

Round bulkhead light for armoured and non-armoured cable

increased safety



0958 50 + 0605 06

For 60 to 150 W incandescent lamps

- Incandescent 60 to 150 W max., mixed 100 W max.
- E27 flameproof lampholder
- Grey painted aluminium alloy base
- Glass diffuser
- Silicone gasket
- Screw locking mechanism
- Operates in any position
- Connection to lampholder via 2 x 2.5 mm² terminals
- Internal earth: two 2 x 2.5 mm² terminals
- External earth: 1 x 4 mm² bracket

Three M20 threaded cable entries in "T" formation

Supplied with : - One M20 cable gland (sealed Ø : 6.5 to 14.5 mm)

Two M20 blanking plugs

Permissible lamp (not supplied)	Weight (kg)	Volume (dm ³)	Cat. No.	Pack
60 to 150 W incandescent 100 W mixed	3	15	0958 50	1

Accessories

Spare parts

	Cat. No.	Pack
Zinc-plated steel protective guard	0958 55	1
Lamp glass	0958 56	1

Increased safety cable gland :

- Polyamid (see page 288)
- Métal (see page 258)
- For armoured cable (see page 252-262)

Reducing fittings and adaptors (see page 260)

Zone 1 & 2 - 21 & 22	ATEX	IEC	EC	II 2 G/D
EEx ell	T1 to T4	T : 92 to 127°C	IP 65	

TECHNICAL DATA

Zones : 1 and 2 and 21-22

Classification:

- According to CENELEC :
 - Conforming to ATEX - 94/9 EC directive and standards EN 50014-18-19
 - EC 0081 II 2 G: for gas EEx e II T(*)
 - EC 0081 II 2 D T = (**) for dust
- According to IEC :
 - Conforming to standards IEC 60079-0/7/11 Ex e II T(*)
 - DIPA 21 TA = (**)

	CENELEC		NB : T4 for		
(*)	+ 40°	+ 50°	Ta + 50°c position		
60 W - 75 W ceiling-mounted wall	T2 T3	T2 T3	wall lampholder downwards		
100 & 150 W incandescent Ceiling-mounted Wall-mounted	T2 T3	T2 T3			
100 W mixed Ceiling-mounted Wall-mounted	T1 T3	T1 T2	T3 for Ta + 50°C wall position lampholder downwards		
(**)	60 W	75 W	100 W inc.	100 W mixed	150 W
T° dust	+92°C	+97°C	+107°C	+127°C	+120°C

Approvals :

- Approved type HBe 150
- CENELEC LCIE 02 ATEX 6228X
- IEC LCIE Ex 02.023X
- declaration of conformity No. 50244
- Conforming to standards for luminaires EN 60598-1 and IEC 60598-1
- Conforming to standards EN 50281-1-1 and IEC 61241-1-1
- "combustible dust"


Protection index :

- IP 65 according to EN 60529 and IEC 600529

Operating temperature : - 40°C to + 50°C

Anticorrosion treatment and climate protection : page G50

Dimensions (mm)

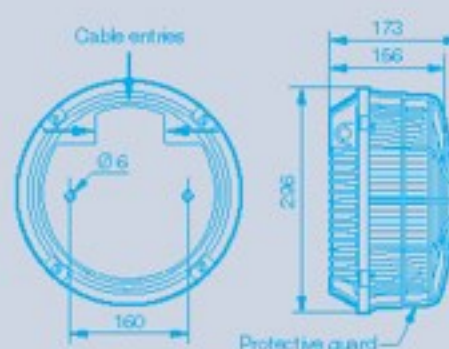


Photometric data (photometry p. G62) polar curves for a 1000 lm flux, according to NF C 71-120 :

- Luminaire symbol according to NF C 71-121

 longitudinal
 transverse

150 W incandescent : 0,62 J + 0,10 T

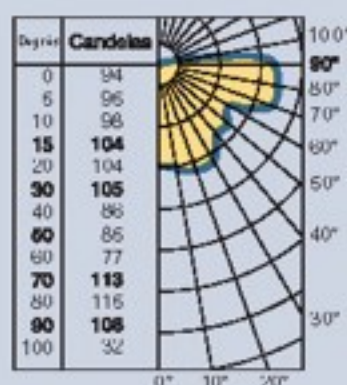

Data sheet available on request