



For mounting on the cover

Indicators

- *Patented system*: heads can be changed without opening the enclosure
- Mounting on the cover (drill holes M22 x 1.5 ISO)
- Connection: 2 x 2.5 mm²
- Supplied with indicator housing fitted with extra bright LED, light diffuser, fixing support at back of box, coloured indicator lens and blank yellow label for marking (60 x 50 mm)
- Service life 100,000 hours at 25°C

12 to 30 V AC/DC

	Weight (Kg)	Volume (dm ³)	Cat. No.	Pack
Red	0.06	0.4	0939 39	1
Green	0.06	0.4	0939 40	1
White	0.06	0.4	0939 41	1
Blue	0.06	0.4	0939 42	1
Yellow	0.06	0.4	0939 54	1

48 to 60 V AC/DC

Red	0.06	0.4	0939 43	1
Green	0.06	0.4	0939 44	1
White	0.06	0.4	0939 45	1
Blue	0.06	0.4	0939 46	1
Yellow	0.06	0.4	0939 56	1

85 to 264 V AC

Red	0.06	0.4	0939 47	1
Green	0.06	0.4	0939 48	1
White	0.06	0.4	0939 49	1
Blue	0.06	0.4	0939 50	1
Yellow	0.06	0.4	0939 57	1

Transfer kit for mounting on the cover

- For replacing indicators 0939 92/93 and 0940 92/99 with the above Cat. Nos. on existing installations

Transfer kit	0.2	0.4	0939 59	1
--------------	-----	-----	----------------	---

Indicator lenses (spare parts)

- Can only be mounted on indicators with identical colour LEDs

Green	0.06	0.4	0940 85	10
Red	0.06	0.4	0940 86	10
White	0.06	0.4	0940 87	10
Yellow	0.06	0.4	0940 89	10

Part number in bold : fast moving references

Zones 1 & 2 - 21 & 22	ATEX	IEC	II 2 G/D
EEx d IIC	IP66	IK10	

TECHNICAL DATA

Zones :

- 1 and 2 and 21 and 22

Classification :

- According to CENELEC:
 - Conforming to ATEX Directive 94/9 EC and standards EN 50014-18
 - 0081 II 2 G EEx d IIC for gas
 - 0081 II 2 D for dust
- According to IEC:
 - Conforming to standards IEC 60079-0/1 Ex d IIC

Certification :

- Approved type TCD
- CENELEC LCIE 02 ATEX 0036U
- IEC LCIE Ex 02 026 U
- Declaration of conformity No. 5C213 for components
- Conforming to standards EN 50281-1-1 and IEC 61241-1-1 "combustible dust"

Protection index :


- IP66 according to EN 60529 and IEC 60529
- IK10 mechanical resistance according to EN 50102

Operating temperature :

- 40 to + 55°C

Anticorrosion treatment and climate protection : see page G50

Dimensions (mm) :

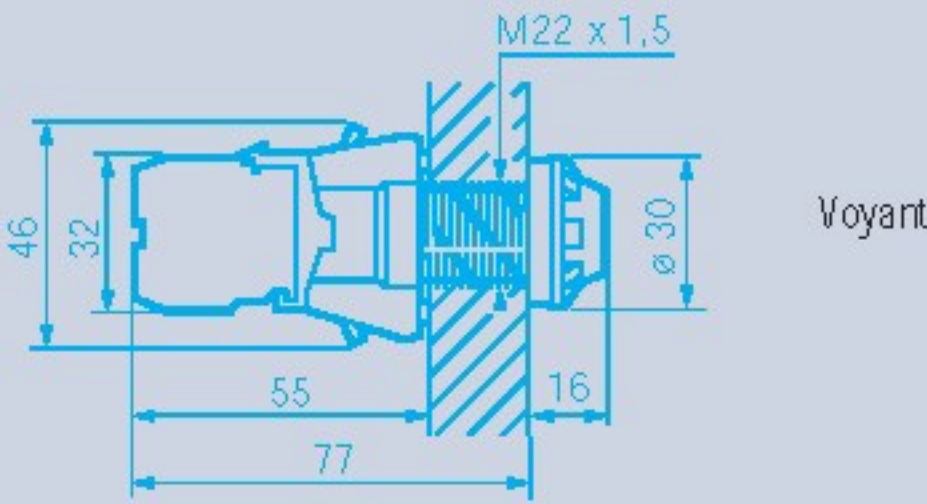

Data sheet available on request