

# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22  
Notable: UKEX, INMETRO, cCSAus Certified

### Applications

- Local control stations and motor control stations for use in hazardous areas covering the broadest possible range of applications.
- Control of equipment at:
  - Power plants
  - Chemical and petrochemical plants
  - Petroleum refineries
  - Reverse osmosis plants
  - Pulp and paper processing plants
  - Various industrial applications
- Push buttons and selector switches are used for remote control of motors and other electric circuits in hazardous locations.
- Pilot lights provide visual assurance that an electrical function is being performed at a remote or hazardous location.
- For use in washdown areas.

### Features

- Operators include push buttons, illuminated push buttons, selector switches, control and load break switches and LED pilot lights.
- M20 polyamide cable gland for unarmored cable Ø 5.5 mm -14 mm (0.22 in - 0.55in).
- Contacts and pilot lights Ex db eb sealed
- Pilot light employs high intensity single LED that can be used at:
  - 12 Vac to 254 Vac 50/60 Hz
  - 12 Vdc to 60 Vdc
- Up to 3 contact blocks per actuator can be used.
- Polyamide cable gland for unarmoured cables Ø 5,5mm-14mm in M20 and Ø 9mm-18mm in M25.
- Earth stud M6
- Contact block technical data:
  - IEC rated operating voltage (Ue): 500 Vac – 110 Vdc
  - IEC switching capacity:
    - AC12: 16 Amp/400 Vac
    - AC14: 10 Amp/400 Vac
    - AC15: 6 Amp/500 Vac
    - DC13: 2 Amp/24 Vdc and 1 Amp/110 Vdc
- Selector switch technical data:
  - IEC rated operating voltage: 690 Vac
  - IEC rated operating current: maximum 16 Amp
  - IEC switching capacity:
    - AC1: 16 Amp/690 Vac
    - AC15: 16 Amp/415 Vac
    - AC3: 8 Amp/500 Vac
    - AC3: 4 Amp/690 Vac
    - AC3: 16 Amp/690 Vac
    - DC1: 10 Amp/24 Vdc
    - DC1: 6 Amp/60 Vdc
    - DC1: 6 Amp/110 Vdc (2 contacts wired in series)
    - DC1: 6 Amp/220 Vdc (3 contacts in series)
- Enclosures are rated for IP66 with firmly secured gasket.
- Operators and contact blocks are spaced for easy wiring.
- TS35 rail mounted components are held securely in place during operation and easily removed for service.
- Brass Inserts are provided for TS35 DIN rails or mounting plates to be installed inside the enclosure.
- Captive, corrosion resistant stainless steel cover screws.



U62APGA3A3



U63W2CA13M3

316L Stained Steel

### Standard Materials

- Body and cover: 316L stainless steel with natural finish
- Cover screws: 316L stainless steel

### Accessories

- Key for changing actuator blocks.
- Guard for mushroom head actuator.
- Padlockable guard.
- Combination drain and breather available in polyamide.

### Options

- Nameplates: Stainless Steel or Lamacoid with different color combinations.
- Padlocking facility for command auxiliary
- Other auxiliary command configurations

### ATEX/IECEx Certification and Compliances

- Certification Type: : U6
  - Gas: Zone 1 and 2
    - Conforming to ATEX 2014/34/EU: Ⓢ II 2 G
    - Type of Protection: Ex eb IIC, db eb IIC, Ex eb mb IIC, Ex db eb mb IIC Gb (depending on components)
    - Temperature Class: T6
  - Dust: Zone 21 and 22
    - Conforming to ATEX 2014/34/EU: Ⓢ II 2 D
    - Type of Protection: Ex tb IIIC Db
  - Surface Temperature: T80 °C (T176 °F)
  - Ambient Temperature: -40 °C or -25 °C (-40 °F to -13 °F) (ammeters and voltmeters) at +55 °C (-131 °F)
  - ATEX Certificate: INERIS 22ATEX0013X
  - IECEx Certificate: IECEx INE 22.0025X
  - Index of Protection according EN/IEC 60529: IP66
  - Impact Resistance (shock): IK08 ①

### UKEX Certification

- UKEX Certificate: CML 22UKEX1604X

### INMETRO Certification

- INMETRO Certificate: BVC23.4214-X

### Other Certifications

- cCSAus Certification available on special request. Contact your local sales representative for more information.

① Other configurations available with IK10 on request. Please contact your local sales representative






# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 1 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number	
<b>Momentary Push Buttons (Imax = 15A)</b>							
	Green insert 'I' + red insert 'O' with 1NO + 1NC momentary contacts	Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	U61W2A3	
			2 x M25	1.2 (2.65)	4.3 (262.40)	U61W4A3	
	1x green push button 'I' with 1NO momentary contact		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	U61W2A5
				2 x M25	1.2 (2.65)	4.3 (262.40)	U61W4A5
	1x red push button 'O' with 1NC momentary contact		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	U61W2A9
				2 x M25	1.2 (2.65)	4.3 (262.40)	U61W4A9
<b>Twin Momentary Push Buttons (Imax = 15A)</b>							
	1x green push button 'I' with 1NO contact 1x red push button 'O' with 1NC contact momentary contacts	Bottom	2 x M20	1.3 (2.87)	4.3 (262.40)	U61W2A5A9	
			2 x M25	1.3 (2.87)	4.3 (262.40)	U61W4A5A9	
	1x green push button 'I' with 1NO + 1NC contacts 1x red push button 'O' with 1NO + 1NC contacts momentary contacts		Bottom	2 x M20	1.3 (2.87)	4.3 (262.40)	U61W2A3A3
				2 x M25	1.3 (2.87)	4.3 (262.40)	U61W4A3A3

① Other configurations available on request. Please contact your local sales representative.











# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 1 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>Emergency Stop (I<sub>max</sub> = 15A)</b>						
 Red mushroom head push-pull 1NC maintained contact		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2D9</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4D9</b>
 Red mushroom head push-pull 1NO + 1NC maintained contacts		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2D3</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4D3</b>
<b>Emergency Stop with key (I<sub>max</sub> = 15A)</b>						
 Red mushroom head key release 1NC maintained contact		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2C9</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4C9</b>
 Red mushroom head key release 1NO + 1NC maintained contacts		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2C3</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4C3</b>
<b>Push Pull Emergency Stop + Push Button (I<sub>max</sub> = 15A)</b>						
 1x red mushroom head push-pull with 1NC maintained contact 1x green push button 'I' with 1NO momentary contact		Bottom	2 x M20	1.3 (2.87)	4.3 (262.40)	<b>U61W2D9A5</b>
			2 x M25	1.3 (2.87)	4.3 (262.40)	<b>U61W4D9A5</b>

① Other configurations available on request. Please contact your local sales representative.











# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 1 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm <sup>3</sup> (in <sup>3</sup> )	Catalog Number
<b>Mushroom Head Push Button (I<sub>max</sub> = 15A)</b>						
 Black mushroom head push button 1NO + 1NC momentary contacts		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2B3</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4B3</b>
 Red mushroom head push button 1NC momentary contact		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2R9</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4R9</b>
<b>Key Push Button (I<sub>max</sub> = 15A)</b>						
 With key removable in both positions 1NO + 1NC maintained contacts		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2E3</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4E3</b>
 With key removable in both positions 1NO maintained contact		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2E5</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4E5</b>
 With key removable in both positions 1NC maintained contact		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2E9</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4E9</b>

① Other configurations available on request. Please contact your local sales representative.






# Unicode™ 2 | U6 Series Stainless Steel Control Stations


## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 1 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>Pilot Light (Umax = 264 Vac/60 Vdc)</b>						
1x red pilot light		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2PR</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4PR</b>
1x green pilot light		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2PG</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4PG</b>
1x blue pilot light		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2PB</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4PB</b>
1x yellow pilot light		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2PY</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4PY</b>
1x white pilot light		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2PW</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4PW</b>



① Other configurations available on request. Please contact your local sales representative.









# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 1 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>Twin Pilot Light (Umax = 264 Vac/60 Vdc)</b>						
 <p>1x green pilot light 1x red pilot light</p>		Bottom	2 x M20	1.3 (2.87)	4.3 (262.40)	U61W2PGPR
			2 x M25	1.3 (2.87)	4.3 (262.40)	U61W4PGPR
<b>Illuminated Push Button: pilot light (Umax = 264 Vac/60 Vdc) and contact (Imax = 13A)</b>						
 <p>1x green illuminated push button with 1NO contact momentary contact</p>		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	U61W2LG5
			2 x M25	1.2 (2.65)	4.3 (262.40)	U61W4LG5
 <p>1x red illuminated push button with 1NC contact momentary contact</p>		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	U61W2LR9
			2 x M25	1.2 (2.65)	4.3 (262.40)	U61W4LR9
<b>Twin Illuminated Push Button (Umax = 264 Vac/60 Vdc) and contact (Imax = 13A)</b>						
 <p>1x green illuminated push button with 1NO contact 1x red illuminated push button with 1NC contact momentary contacts</p>		Bottom	2 x M20	1.3 (2.87)	4.3 (262.40)	U61W2LG5LR9
			2 x M25	1.3 (2.87)	4.3 (262.40)	U61W4LG5LR9

① Other configurations available on request. Please contact your local sales representative.









# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 1 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>2-Position Selector Switch (I<sub>max</sub> = 15A)</b>						
 <p>1 selector switch                      2 fixed positions '0 - I'                      1NO + 1NC contacts</p>		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2H3</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4H3</b>
<b>3-Position Selector Switch (I<sub>max</sub> = 15A)</b>						
 <p>1 selector switch                      3 fixed positions 'I - 0 - II'                      2NO contacts</p>		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2J1</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4J1</b>
<b>3-Position Selector Switch (I<sub>max</sub> = 12A)</b>						
 <p>1 selector switch                      3 positions                      'I - 0 - II'                      with spring return from I to 0                      1NO + 1NC contacts</p>		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2N3</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4N3</b>
 <p>1 selector switch                      3 positions                      'I - 0 - II'                      with spring return from II to 0                      1NO + 1NC contacts</p>		Bottom	2 x M20	1.2 (2.65)	4.3 (262.40)	<b>U61W2M3</b>
			2 x M25	1.2 (2.65)	4.3 (262.40)	<b>U61W4M3</b>

Control Stations and Panels

① Other configurations available on request. Please contact your local sales representative.









# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 2 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts.

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>Twin Push Button (Imax = 13A)</b>						
 <p>1x green push button 'I' with 1NO contact                      1x red push button 'O' with 1NC contact momentary contacts</p>		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2A5A9</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4A5A9</b>
 <p>1x green push button 'I' with 1NO + 1NC contact                      1x red push button 'O' with 1NO + 1NC contact momentary contacts</p>		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2A3A3</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4A3A3</b>
<b>Push Button + Push-Pull Emergency Stop (Imax 13A)</b>						
 <p>1x green push button 'I' with 1NO momentary contact                      1x red mushroom head push-pull with 1NC maintained contact</p>		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2A5D9</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4A5D9</b>
 <p>1x green push button 'I' with 1NO + 1NC momentary contacts                      1x red mushroom head push-pull with 1NO + 1NC maintained contacts</p>		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2A3D3</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4A3D3</b>

① Other configurations available on request. Please contact your local sales representative.



# Unicode™ 2 | U6 Series Stainless Steel Control Stations


## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 2 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>Pilot Light (Umax = 264 Vac/60 Vdc) + Push Button (Imax = 13A)</b>						
1x green light 1x green push button 'I' with 1NO momentary contact		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2PGA5</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4PGA5</b>
1x green light 1x green push button 'I' with 1NO + 1NC momentary contacts		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2PGA3</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4PGA3</b>
1x red light 1x red push button 'O' with 1NC momentary contact		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2PRA9</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4PRA9</b>
1x red light 1x red push button 'O' with 1NO + 1NC momentary contacts		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2PRA3</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4PRA3</b>



① Other configurations available on request. Please contact your local sales representative.













# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 2 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>Twin Push Buttons + Push-Pull Emergency Stop (Imax = 13A)</b>						
 <p>1x green push button 'I' with 1NO contact                      1x red push button 'O' with 1NC contact                      1x red mushroom head push-pull with 1x NO + 1NC momentary contacts</p>		Bottom	2 x M20	1.9 (4.19)	4.5 (274.6)	<b>U62W2A5A9D9</b>
			2 x M25	1.9 (4.19)	4.5 (274.6)	<b>U62W4A5A9D9</b>
<b>Pilot Light (Umax = 264 Vac/60 Vdc) + Twin Push Buttons (Imax = 13A)</b>						
 <p>1x green light                      1x green push button 'I' with 1NO                      1x red push button 'O' with 1NC momentary contacts</p>		Bottom	2 x M20	1.9 (4.19)	4.5 (274.60)	<b>U62W2PGA5A9</b>
			2 x M25	1.9 (4.19)	4.5 (274.60)	<b>U62W4PGA5A9</b>
 <p>1x red light                      1x green push button 'I' with 1NO                      1x red push button 'O' with 1NC momentary contacts</p>		Bottom	2x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2PRA5A9</b>
			 <p>1x green light                      1x green push button 'I' with 1NO + 1NC                      1x red push button 'O' with 1NO + 1NC momentary contacts</p>		Bottom	2 x M20
 <p>1x red light                      1x green push button 'I' with 1NO + 1NC                      1x red push button 'O' with 1NO + 1NC momentary contacts</p>		Bottom				2 x M20
<b>Ammeter (Imax = 1A)</b>						
 <p>1 x ammeter 48 x 48 mm                      1 A.C.T., 3 F.L.C., with 0-1-3 scale</p>		Bottom	2 x M20	1.8 (3.97)	4.3 (262.40)	<b>U62W2CA13</b>
			2 x M25	1.8 (3.97)	4.3 (262.40)	<b>U62W4CA13</b>

① Other configurations available on request. Please contact your local sales representative.











# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Size 3 Stainless Steel 316L Control Station ①

Included: 1 white self-adhesive gravoply nameplate black letters, 2 x M20/M25 bottom clearance entries, M6 earth stud, 1 blanking plug, 1 polyamide cable gland, 2 locknuts

Description/Function	Diagram	Entry Location	Entry Size	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
<b>Twin Pilot Light (Umax = 264 Vac/60 Vdc)+ Twin Push Buttons (Imax = 14A)</b>						
 <p>1x green light                      1x red light                      1x green push button 'I'                      with 1NO contact                      1x red push button 'O'                      with 1NC contact                      momentary contacts</p>	 <p>Bottom</p>	2 x M20	2.1 (4.63)	10.5 (640.70)	<b>U63W2PGPRA5A9</b>	
		2 x M25	2.1 (4.63)	10.5 (640.70)	<b>U63W4PGPRA5A9</b>	
<b>Pilot Light (Umax = 264 Vac/60 Vdc)+ Twin Push Buttons + Push-Pull Emergency Stop (Imax = 14A)</b>						
 <p>1x green light                      1x green push button 'I'                      with 1NO contact                      1x red push button 'O'                      with 1NC contact                      momentary contacts                      1x red mushroom head push-pull                      with 1x NC maintained contact</p>	 <p>Bottom</p>	2 x M20	2.1 (4.63)	10.5 (640.70)	<b>U63W2PGA5A9D9</b>	
		2 x M25	2.1 (4.63)	10.5 (640.70)	<b>U63W4PGA5A9D9</b>	
<b>Twin Pilot Lights (Umax = 264 Vac/60 Vdc) + Push-Pull Emergency Stop + Push Button (Imax = 14A)</b>						
 <p>1x green light + 1x red light                      1x red mushroom head push-pull                      with 1x NC maintained contact                      1x green push button 'I'                      with 1NO                      momentary contact</p>	 <p>Bottom</p>	2 x M20	2.1 (4.63)	10.5 (640.70)	<b>U63W2PGPRD9A5</b>	
		2 x M25	2.1 (4.63)	10.5 (640.70)	<b>U63W4PGPRD9A5</b>	
<b>Ammeter + Twin Push Buttons (Imax = 10A)</b>						
 <p>1x ammeter 48 x 48 mm, 1A C.T., 3 F.L.C., with 0 - 1 - 3 scale                      1x green push button 'I'                      with 1NO contact                      1x red push button 'O'                      with 1NC contact                      momentary contacts</p>	 <p>Bottom</p>	2 x M20	2.1 (4.63)	10.5 (640.70)	<b>U63W2CA13A5A9</b>	
		2 x M25	2.1 (4.63)	10.5 (640.70)	<b>U63W4CA13A5A9</b>	
<b>Ammeter + 3 position selector switch (Imax = 10A)</b>						
 <p>1x ammeter 48 x 48 mm, 1A C.T., 3 F.L.C., with 0 - 1 - 3 scale                      1x switch 3 positions 'I - 0 - II' with spring return from II to 0                      1NO + 1NC contacts</p>	 <p>Bottom</p>	2 x M20	2.1 (4.63)	10.5 (640.70)	<b>U63W2CA13M3</b>	
		2 x M25	2.1 (4.63)	10.5 (640.70)	<b>U63W4CA13M3</b>	

① Other configurations available on request. Please contact your local sales representative.

# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Nameplates — Set of 10

Blank self-adhesive, laminated plastic 58 mm x 18 mm (2.29" x 0.71").

Color	Catalog Number
White (black letters)	UNPW
Yellow (black letters)	UNPY
Red (white letters)	UNPR
Blue (white letters)	UNPB
Black (white letters)	UNPN
Green (white letters)	UNPG

### Inserts for Push Button — Set of 5

Marking	Color	Catalog Number
(unmarked)	Green	UIAG
(unmarked)	Red	UIAR
(unmarked)	Yellow	UIAY
(unmarked)	White	UIAW
(unmarked)	Blue	UIAB
(unmarked)	Black	UIAN
ON	Green	UIA01
OFF	Red	UIA02
START	Green	UIA03
STOP	Red	UIA04
MARCHE	Green	UIA05
ARRET	Red	UIA06
I	Green	UIA07
O	Red	UIA08

### Inserts for Illuminated Push Button — Set of 5

Marking	Color	Catalog Number
(unmarked)	Green	UILG
(unmarked)	Red	UILR
(unmarked)	Yellow	UILY
(unmarked)	White	UILW
(unmarked)	Blue	UILB
ON	Green	UIL01
OFF	Red	UIL02
START	Green	UIL03
STOP	Red	UIL04
MARCHE	Green	UIL05
ARRET	Red	UIL06
I	Green	UIL07
O	Red	UIL08

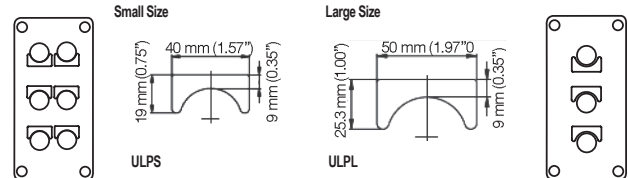
### Spare Key

For all key-operated buttons.

Description	Catalog Number
Spare key type 4 A 185	SK4A185

### Standard Legend Plates

Two sizes available. Self-adhesive yellow laminated plastic (black lettering).











Text	Catalog Number	
	Small	Large
Blank (set of 10)	ULPS	ULPL
ON	ULPSA01	ULPLA01
OFF	ULPSA02	ULPLA02
FORWARD	ULPSA03	ULPLA03
REVERSE	ULPSA04	ULPLA04
JOG	ULPSA05	ULPLA05
RUN	ULPSA06	ULPLA06
START	ULPSA07	ULPLA07
STOP	ULPSA08	ULPLA08
UP	ULPSA09	ULPLA09
DOWN	ULPSA10	ULPLA10
FAST	ULPSA11	ULPLA11
SLOW	ULPSA12	ULPLA12
RAISE	ULPSA13	ULPLA13
LOWER	ULPSA14	ULPLA14
OPEN	ULPSA15	ULPLA15
CLOSE	ULPSA16	ULPLA16
LOW	ULPSA17	ULPLA17
HIGH	ULPSA18	ULPLA18
TEST	ULPSA19	ULPLA19
RESET	ULPSA20	ULPLA20
EMERGENCY STOP	ULPSA21	ULPLA21
MARCHE	ULPSA22	ULPLA22
ARRET	ULPSA23	ULPLA23
ARRET D'URGENCE	ULPSA24	ULPLA24
HAUT	ULPSA25	ULPLA25
BAS	ULPSA26	ULPLA26
O - I	ULPSH01	ULPLH01
ON - OFF	ULPSH02	ULPLH02
START - STOP	ULPSH03	ULPLH03
STOP - START	ULPSH04	ULPLH04
HAND - AUTO	ULPSH05	ULPLH05
MANU - AUTO	ULPSH06	ULPLH06
FORWARD - REVERSE	ULPSH07	ULPLH07
REMOTE - LOCAL	ULPSH08	ULPLH08
MARCHE - ARRET	ULPSH09	ULPLH09
I - O - II	ULPSJ01	ULPLJ01
OFF - O - ON	ULPSJ02	ULPLJ02
START - NORMAL - STOP	ULPSJ03	ULPLJ03
HAND - OFF - AUTO	ULPSJ04	ULPLJ04
MANU - O - AUTO	ULPSJ05	ULPLJ05
FORWARD - OFF - REVERSE	ULPSJ06	ULPLJ06
LOCAL - REMOTE - AUTO	ULPSJ07	ULPLJ07
LOCAL - O - REMOTE	ULPSJ08	ULPLJ08
MARCHE - NORMAL - ARRET	ULPSJ09	ULPLJ09

# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

	Description	Catalog Number
	<p><b>Additional Contacts</b></p> <p>Each actuator is capable of activating 3 contacts.                      Exception: Illuminated push button and all actuators with key: 2 contacts maximum</p> <p>1NO contact</p> <p>1NC contact</p>	<p><b>UCB5R</b></p> <p><b>UCB9R</b></p>
	<p><b>Yellow Guard</b></p> <p>Mushroom head protection for emergency stop</p>	<b>098657</b>
	<p><b>Padlockable Guard</b></p> <p>Stainless steel and plastic cover, capacity: 3 padlocks diameter 6 mm (0.24") maximum (not supplied)</p> <p>For push button and rotary actuator</p> <p>For mushroom head actuator</p>	<p><b>UPLD1S</b></p> <p><b>UPLD2S</b></p>
	<p><b>Cable Gland Exe</b></p> <p>For unarmored cable Exe - IP66 - in polyamide with entry thread seal</p> <p>M20 (capacity 5.5-14.5 mm)</p>	<b>20DTSPE1TAL</b>
	<p><b>For armored cable Exe/Exd - IP66 - in nickel plated brass (without entry thread seal)</b></p> <p>Braid and Tape type:</p> <p>M20 (inner: 6.4-14.0/outer: 12.5-20.9 mm)</p> <p>Single Wired Armor (SWA):</p> <p>M20 (inner: 6.4-14.0/outer: 12.5-20.9 mm)</p>	<p><b>20E1FX5</b></p> <p><b>20E1FW5</b></p>
	<p><b>Adaptors</b></p> <p>Exd/Exe - IP66 in nickel plated brass (without entry thread seal)</p> <p>Male M20 - Female 1/2" NPT</p> <p>Male M20 - Female 3/4" NPT</p>	<p><b>737DM2T15</b></p> <p><b>737DM2T25</b></p>
	<p><b>Entry Thread Seal</b></p> <p>M20 (in white nylon)</p>	<b>20ETS2</b>
	<p><b>Combination Drain and Breather</b></p> <p>Exe - IP66 - supplied with entry thread seal and locknut</p> <p>M20 male thread in Polyamide</p> <p>M20 male thread in Brass</p> <p>M20 male thread in Stainless Steel</p>	<p><b>DBE20P</b></p> <p><b>DBE20B</b></p> <p><b>DBE20S</b></p>

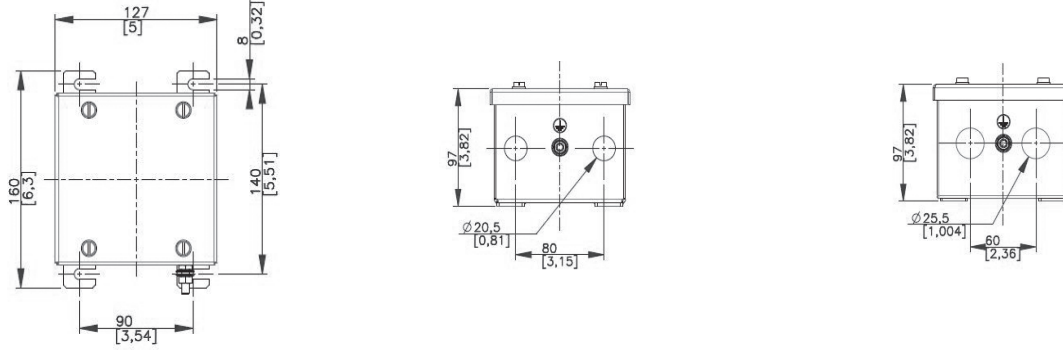
# Unicode™ 2 | U6 Series Stainless Steel Control Stations

## Increased Safety

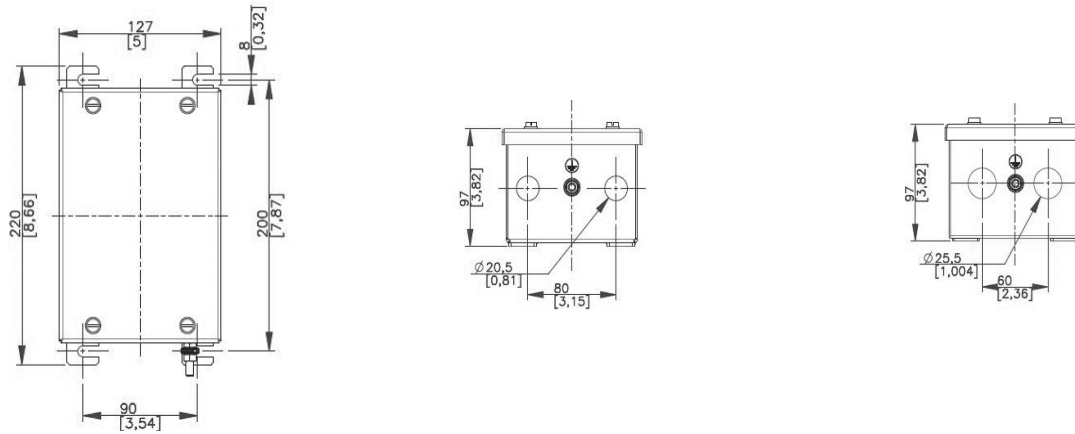
ATEX/IECEx: Zones 1 and 2 – 21 and 22  
 Notable: UKEX, INMETRO, cCSAus Certified

### Dimensions in Millimeters (Inches)

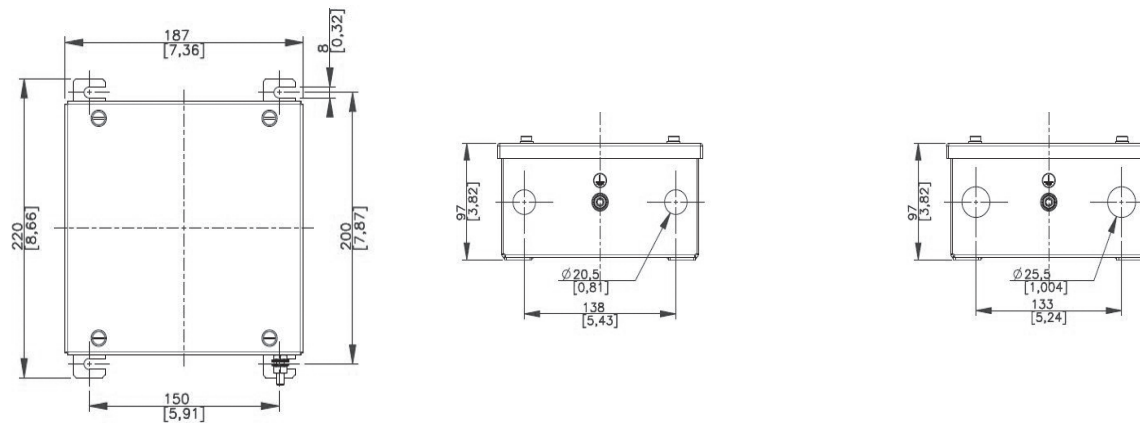
#### Size 1



#### Size 2



#### Size 3



Control Stations and Panels