

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Applications

- The IEC PlexPower™ factory sealed panelboard provides indoor and outdoor protection and control of electrical circuits in hazardous environments such as:
 - Petroleum plants
 - Chemical plants
 - Refineries
 - Other process facilities
- Ideal for placement in wet, corrosive environments or where flammable gases or vapors are likely to be present.
- Suitable for use on lighting, heat trace and power circuits.

Features

- No external conduit or cable seals required thus making installations faster, easier, and less costly.
- Limitless flexibility through horizontal and vertical coupling options.
- The PlexPower™ factory sealed panelboard features a ground-breaking design that uses individual breaker housings to minimize the downtime and costs associated with servicing circuit breakers in hazardous locations.
- The lighter weight panelboard enclosure can be quickly opened in the field for easier servicing.
- Supplied as standard:
 - Bottom entries with brass earth plate
 - Pre-drilled supplied with non Ex certified temporary plastic plugs
 - Standard hard wired, copper cables
 - Color coded wiring for phases; neutral (blue) and ground (yellow/green)
 - Internal actuators
 - Internal wiring duct
 - Phenolic nameplate (specify legend)
- Optional gland plate at the bottom of enclosure can be easily field punched or drilled for cable or conduit entries. See options.
- 1 circuit to 72 circuit panelboard configurations are standard, with or without main breaker.
- Schneider ■ breakers are supplied as standard, making replacements readily available.
- PlexPower™ breakers accommodate ABB ☼ breakers. For a custom panelboard designed with ABB breakers, contact your local sales representative.
- Branch circuit breakers available in 1-, 2- 3- and 4-pole. Current ratings on branch breakers:
 - 1-pole: 120, 240 Volts, 63 Amps maximum.
 - 2-, 3- and 4-pole: 240 and 415 Volts, 63 Amps maximum.
- Branch breakers are labeled with numbers:
 - Odd numbers for line side
 - Even numbers for load side.
 - Labeled with inside breaker details
- Main circuit breaker:
 - 40 to 250 Amps, 2-, 3- or 4-pole.
- Branch and main breakers can be padlocked in either the “On” or “Off” position.
- Breaker modules supplied with captive bolts.
- Ground bar provided as standard.
- External ground lug provided as standard.
- 240/415 Volt breaker module 8-pole terminal wire range 2.5 mm² through 10 mm² (standard), 16 mm² with special lug.



Stainless Steel

Fiberglass Reinforced Polyester

- 600 Volt main breaker module 4-pole terminal wire range 16 mm² through 150 mm².
- Ambient temperature ratings:
 - Standard model: -20 °C/-40 °C to +55 °C (-29 °F/-40 °F to +131 °F)
 - Standard model without switching: -40 °C (-40 °F)

Standard Materials

- Enclosure: fiberglass reinforced polyester (FRP) or stainless steel
- Hardware: stainless steel
- Bus bar: hard drawn copper
- Chassis: hot dip galvanized for wall mounting use

Options

- A wide range of components can be included, contact your local sales representative for additional information:
 - Voltmeter
 - Ammeter
 - Contacts and pilot lights
 - 16 Amp Switches
 - FU40 Series fuse holders
 - Heater
 - Thermostat
 - TRE Series Transformer
 - Terminal blocks
- Ex of IIC Certification available, contact your local sales representative for a quote
- Alternate frame (structure) available for floor mounting or self standing with and without canopy. Contact your local sales representative for additional information.

■ Schneider is a registered trademark of Schneider Electric.

☼ ABB Asea Brown Boveri Ltd is registered with the commercial register of Zurich, Switzerland.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

ATEX/IECEx Certifications and Compliances

- Certification Type: PXP
 - Gas, Zones 1 and 2:
 - Conforming to ATEX 2014/34/EU: Ⓜ II2G
 - Equipment Protection Level: EPL Gb
 - Type of Protection: Ex db eb IIB + H2 or IIC Gb;
Ex db eb mb IIB + H2 or IIC Gb (if distribution panel is equipped with voltmeter)
 - Temperature Class: T3 to T5 depending on layout and ambient temperature
 - Dusts, Zones 21 and 22:
 - Conforming to ATEX 2014/34/EU: Ⓜ II2D
 - Equipment Protection Level: EPL Db
 - Type of Protection: Ex tb IIIC
 - Surface Temperature: +50 °C to +140 °C (+122 °F to +284 °F) depending on layout and ambient temperature
 - Ambient Temperatures ①: -20 °C (-4 °F) ≤ Tamb. ≤ +55 °C (+131 °F). For -40 °C (-40 °F) ambient temperature, contact the factory
- ATEX Certificate: LCIE 20 ATEX 3005 X
- IECEx Certificate: IECEx LCIE 20.0004X
- Index of Protection according EN/IEC 60529: IP66


① The minimum ambient temperature depends on the minimum operating temperature of the integrated components..

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Catalog Numbering Guide ①

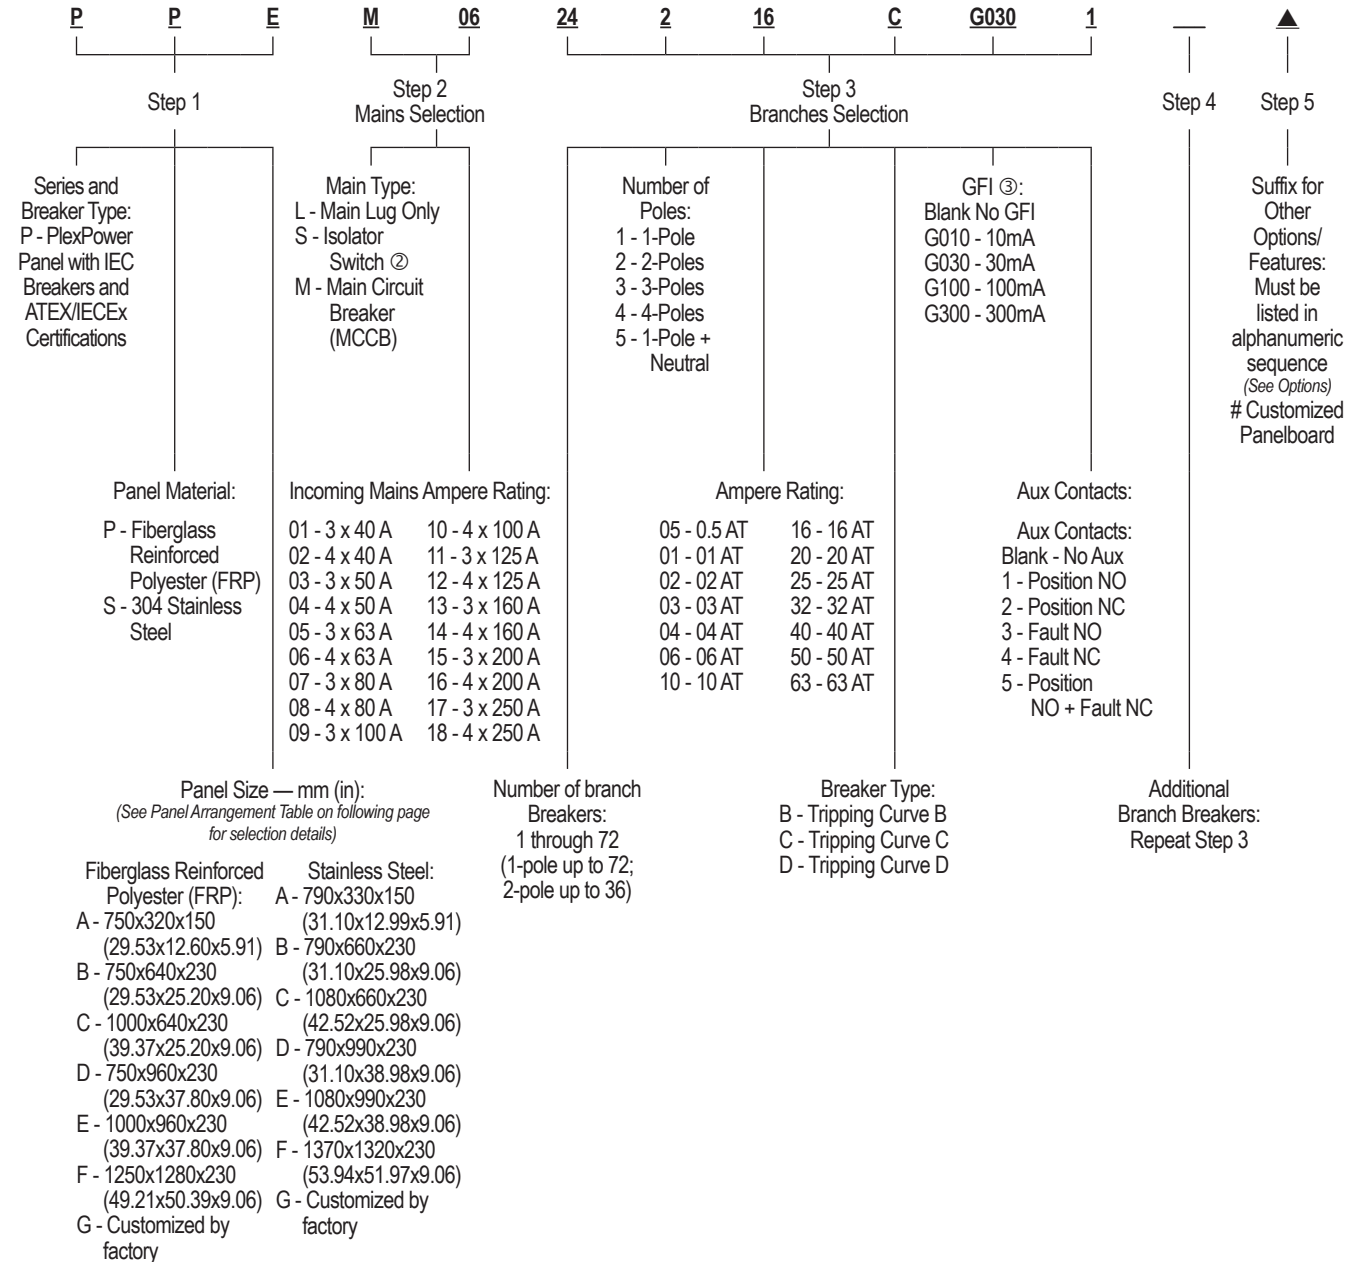

① Please use step by step catalog number on next page.
② Isolators are molded case Switches (MCS).
③ For detailed information see table "Vigi iC60 Add-On Residual Current Devices (RCD or GFI)" on following pages.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEX: Zones 1 and 2 – 21 and 22

Steps to Creating Catalog Number:

To create a complete catalog number, refer to the Catalog Numbering Guide on previous page. Product selection information is available within the Guide.

P	P	E	M	06	12	2	16	C	G030	1	▲	—
Step 1			Step 2		Step 3					Step 4	Step 5	

Step 1: Series is P

Material is P or S

Choose panel arrangement (A, B, C, D, E or F; see drawing at the end of the section for number of circuits).

Step 2: Choose either main lug (L), isolator switch (S) or main circuit breaker (M)

Choose the ampere rating of incoming mains (3 or 4 poles plus ampere: 40, 50, 63, 80, 100, 125, 160, 200, 250)

If a main breaker is desired indicate amperage rating; Example: PPEM06 – 4-pole 63 Amp main breaker.

Step 3: Choose the number of branch breakers

Choose the number of poles

Choose the ampere rating

Choose the breaker type

Choose OPTIONAL GFI

Choose OPTIONAL auxiliary contacts

First digit is the number of branch breakers, second digit is the number of poles, third number is the ampere rating, fourth number is the breaker type and the fifth and six are optional GFI and/or auxiliary contacts; Example: 12216CG0301 is a 2-pole 16 Amp breaker 30 mA GFI with one auxiliary position contact with tripping curve C.

Step 4: Repeat Step 3 for as many breaker types are required (please refer to standard configurations).

Step 5: Panel options: Add options in alphanumeric order as listed Options in the Catalog Numbering Guide or Options in the introductory section.

To be Noted When Selecting Panelboards

Entries for Mains Lugs, Isolator Switch, Main Circuit Breaker and Branch circuit breakers are based on rated Amps.

1. Entries

Incoming Rating	Terminal Size mm ²	AWG	Wire Range mm ²	AWG	Entry Sizes
40 Amp	10	8	1.5 - 16	16-6	M25
50 Amp	16	6	1.5 - 25	14-6	M32
63 Amp	35	2	2.5 - 50	12-2	M32
80 Amp	35	2	2.5 - 50	12-2	M32
100 Amp	50	1/0	10 - 70	10-1/0	M32/M40
125 Amp	50	1/0	10 - 70	10-1/0	M40/M50
160 Amp	70	2/0	10 - 95	8-2/0	M50/M63
200 Amp	120	4/0	16 - 150	4-4/0	M63/M75
250 Amp	120	4/0	16 - 150	4-4/0	M63/M75

Outgoing Branches ①	Terminal Size mm ²	AWG	Wire Range mm ²	AWG	Entry Sizes
20 Amp	6	8	1.5 - 10	22-8	M20
32 Amp	6	8	1.5 - 10	22-8	M25
40 Amp	10	8	1.5 - 16	16-8	M25
50 Amp	16	6	1.5 - 25	14-6	M32
63 Amp	16	6	2.5 - 50	14-6	M32

2. Outgoing terminal blocks

Up to 32 A, fitted with WDU6 terminals as standard.











① All outgoing entries must match respective cable sizes based on outgoing ratings.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEX: Zones 1 and 2 – 21 and 22

Panel Arrangement Size Selection Guide

Bus Amps	Volts	Branch Breakers	8-Pole Module	Circuit configurations Main Lugs, Isolator Switch or Main Breaker Maximum no of 8-Poles modules in each Arrangement	Panel Arrangements ①				
					A/B	C	D	E	F
				Maximum number of circuits per module	Maximum Number of Circuits				
63-250 V	220-240/ 380-415, 440 V	1-Pole		8	16	24	32	48	72
		1-Pole + Aux (NO or NC)		4	8	12	16	24	36
		2-Poles		4	8	12	16	24	36
		3-Poles		2	4	6	8	12	18
		4-Poles		2	4	6	8	12	18
		2-Poles + Aux (NO or NC)		2	4	6	8	12	18
		3-Poles + Aux (NO or NC)		2	4	6	8	12	18
		4-Poles + Aux (NO or NC)		1	2	3	4	6	9
		2-Poles + Aux (NO + NC)		2	4	6	8	12	18
		3-Poles + Aux (NO + NC)		1	2	3	4	6	9











① Panel Arrangement A has the same number of circuits as Panel Arrangements B without the Mains.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Panel Arrangement Size Selection Guide (continued)

Bus Amps	Volts	Branch Breakers	8-Pole Module	Circuit configurations Main Lugs, Isolator Switch or Main Breaker Maximum no of 8-Poles modules in each Arrangement	Panel Arrangements ①				
					A/B	C	D	E	F
				Maximum number of circuits per module	Maximum Number of Circuits				
63-250 V	220-240/ 380-415, 440 V ③	4-Poles + Aux (NO + NC)		1	2	3	4	6	9
		2-Poles + GFI		2	4	6	8	12	18
		3-Poles + GFI		1	2	3	4	6	9
		4-Poles + GFI		1	2	3	4	6	9
		2-Poles + GFI + Aux (NO or NC)		2	4	6	8	12	18
		3-Poles + GFI + Aux (NO or NC)		1	2	3	4	6	9
		4-Poles + GFI + Aux (NO or NC)		1	2	3	4	6	9
		2-Poles + GFI + Aux (NO + NC)		1	2	3	4	6	9
		3-Poles + GFI + Aux (NO + NC)		1	2	3	4	6	9
		4-Poles + GFI + Aux (NO + NC) ②		1	2	3	4	6	9

① Panel Arrangement A has the same number of circuits as Panel Arrangements B without the Mains.

② Up to 25 Amps only.

③ 440 V without GFI.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Schneider Mains Circuit Breaker (MCCB) Specifications

Common Characteristics

Rated Voltages	Insulation voltage (V)	Ui	800
	Impulse withstand voltage (kV)	Uimp	8
	Operational voltage (V)	Ue	AC 50/60 Hz 690
Compliances	Suitability for isolation		IEC/EN 60947-2 Yes
	Utilisation category		A
	Pollution degree		IEC 60664-1 3

Breaking Capacity

Circuit Breakers		NSX100						NSX160						NSX250																	
Breaking Capacity Levels ①		B	F	N	H	S	L	R	HB1 ②	HB2	B	F	N	H	S	L	B	F	N	H	S	L	R	HB1 ②	HB2						
Rated current (A)	In	100						100						160						250						250					
Number of poles		2 ③, 3, 4						2 ③, 3, 4						2 ③, 3, 4						2 ③, 3, 4						2 ③, 3, 4					

Breaking capacity (kA rms)

Icu AC 50/60 Hz	220/240 V	40	85	90	100	120	150	200	—	—	40	85	90	100	120	150	40	85	90	100	120	150	200	—	—
	380/415 V	25	36	50	70	100	150	200	—	—	25	36	50	70	100	150	25	36	50	70	100	150	200	—	—
	440 V	20	35	50	65	90	130	200	—	—	20	35	50	65	90	130	20	35	50	65	90	130	200	—	—
	500 V	15	25	36	50	65	70	80	85	100	15	30	36	50	65	70	15	30	36	50	65	70	80	85	100
	525 V	—	22	35	35	40	50	65	80	100	—	22	35	35	40	50	—	22	35	35	40	50	65	80	100
	660/690 V	—	8	10	10	15	20	45	75	100	—	8	10	10	15	20	—	8	10	10	15	20	45	75	100

Service breaking capacity (kA rms)

Ics AC 50/60 Hz	220/240 V	40	85	90	100	120	150	200	—	—	40	85	90	100	120	150	40	85	90	100	120	150	200	—	—
	380/415 V	25	36	50	70	100	150	200	—	—	25	36	50	70	100	150	25	36	50	70	100	150	200	—	—
	440 V	20	35	50	65	90	130	200	—	—	20	35	50	65	90	130	20	35	50	65	90	130	200	—	—
	500 V	7.5	12.5	36	50	65	70	80	85	100	15	30	36	50	65	70	15	30	36	50	65	70	80	85	100
	525 V	—	11	35	35	40	50	65	80	100	—	22	35	35	40	50	—	22	35	35	40	50	65	80	100
	660/690 V	—	4	10	10	15	20	45	75	100	—	8	10	10	15	20	—	8	10	10	15	20	45	75	100

① Electrical characteristics as per IEC 60947-2.

② There is no 160 A frame, use 250 A frame with lower amperage trip units for R, HB1, HB2.

③ 2P circuit breaker in 3P case for B and F types, only with thermal-magnetic trip unit.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Schneider Branch Circuit Breaker Specifications

iC60N Circuit Breakers — Standard Offering — Curve B, C, D

Alternating current (AC) 50/60 Hz — Breaking capacity (Icu)

		Voltage (Ue) ①				Voltage (Ue) ②	
Ph/Ph (2P, 3P, 4P)		12 to 133 V	220 to 240 V	380 to 415 V	440 V	400 V	Service Breaking Capacity (Ics)
Ph/N (1P, 1P+N)		12 to 60 V	100 to 133 V	220 to 240 V	—	230 V	
Rating (In)	0.5 to 4 A	50 kA	50 kA	50 kA	25 kA	6 kA	100% of Icu
	6 to 63 A	36 kA	20 kA	10 kA	6 kA	6 kA	75% of Icu

iC60H Circuit Breakers — Optional Offering — Curve B, C, D

Alternating current (AC) 50/60 Hz — Breaking capacity (Icu)

		Voltage (Ue) ①				Voltage (Ue) ②	
Ph/Ph (2P, 3P, 4P)		12 to 133 V	220 to 240 V	380 to 415 V	440 V	400 V	Service Breaking Capacity (Ics)
Ph/N (1P, 1P+N)		12 to 60 V	100 to 133 V	220 to 240 V	—	230 V	
Rating (In)	0.5 to 4 A	70 kA	70 kA	70 kA	50 kA	10 kA	100% of Icu
	6 to 63 A	42 kA	30 kA	15 kA	10 kA	10 kA	50% of Icu

iC60L Circuit Breakers — Optional Offering — Curve B, C, K, Z

Alternating current (AC) 50/60 Hz — Breaking capacity (Icu) according to IEC/EN 60947-2

		Voltage (Ue) ①				Voltage (Ue) ②	
Ph/Ph (2P, 3P, 4P)		12 to 133 V	220 to 240 V	380 to 415 V	440 V	400 V	Service Breaking Capacity (Ics)
Ph/N (1P)		12 to 60 V	100 to 133 V	220 to 240 V	—	230 V	
Rating (In)	0.5 to 4 A	100 kA	100 kA	100 kA	70 kA	15 kA	100% of Icu
	6 to 25 A	70 kA	50 kA	25 kA	20 kA	15 kA	50% of Icu
	32/40 A	70 kA	36 kA	20 kA	15 kA	15 kA	50% of Icu
	50/63 A	70 kA	30 kA	15 kA	10 kA	—	50% of Icu

① Breaking capacity (Icu) according to IEC/EN 60947-2.

② Breaking capacity (Icn) according to IEC/EN 60898-1.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Schneider Branch Circuit Breaker Specifications (continued)

Vigi iC60 Add-On Residual Current Devices (RCD or GFI) — Optional

Voltage rating (Ue): 230 - 240 V, 400 - 415 V

Operating frequency: 50/60 Hz

	Amps	Sensitivity			
		10 mA	30 mA	300 mA	100 mA
2P	0.5 to 25 A	X	X	X	X
	32 to 40 A	—	X	X	—
	50 to 63 A	—	X	X	X
3P	0.5 to 25 A	—	X	X	—
	32 to 40 A	—	X	X	—
	50 to 63 A	—	X	X	—
4P	0.5 to 25 A	—	X	X	X
	32 to 40 A	—	X	X	—
	50 to 63 A	—	X	X	X

Auxiliary Contact

Maximum	Terminal Size		Wire Range	
	mm ²	AWG	mm ²	AWG
6 Amp	2.5	12	1.5 - 4	26 - 12

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Cascading — Panelboard Short Circuit Ratings

Upstream: NSX100 — Downstream: iC60 — Ue: 380-415 V (Ph/N 220-240 V)

Upstream	NSX100						
	NSX100B	NSX100F	NSX100N	NSX100H	NSX100S	NSX100L	
Breaking capacity (kA)	25	36	50	70	100	150	
Downstream							
	In Max (A)	Icu (kA)	Reinforced breaking capacity (kA)				
iC60N	63	10	20	25	30	30	30
iC60H	40	15	25	36	40	40	40
	63	15	25	36	36	36	36
iC60L	25	25	—	36	40	40	40
	40	20	25	36	40	40	40
	63	15	25	36	36	36	36

Upstream: NSX160 — Downstream: C60 — Ue: 380-415 V (Ph/N 220-240 V)

Upstream	NSX160						
	NSX160B	NSX160F	NSX160N	NSX160H	NSX160S	NSX160L	
Breaking capacity (kA)	25	36	50	70	100	150	
Downstream							
	In Max (A)	Icu (kA)	Reinforced breaking capacity (kA)				
iC60N	63	10	20	25	30	30	30
iC60H	40	15	25	36	40	40	40
	63	15	25	30	30	30	30
iC60L	25	25	—	36	40	40	40
	40	20	25	36	40	40	40
	63	15	25	30	36	36	36

Upstream: NSX250 — Downstream: iC60 — Ue: 380-415 V (Ph/N 220-240 V)

Upstream	NSX250						
	NSX250B	NSX250F	NSX250N	NSX250H	NSX250S	NSX250L	
Breaking capacity (kA)	25	36	50	70	100	150	
Downstream							
	In Max (A)	Icu (kA)	Reinforced breaking capacity (kA)				
iC60N	40	10	20	25	30	30	30
	63	10	20	25	25	25	25
iC60H	40	15	25	30	30	30	30
	63	15	25	25	25	25	25
iC60L	25	25	—	30	30	30	30
	40	20	25	30	30	30	30
	63	15	25	25	25	25	25

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Cascading — Panelboard Short Circuit Ratings (continued)

Upstream: NSX100 — Downstream: iC60 — Ue: 440 V

Upstream	NSX100						
	NSX100B	NSX100F	NSX100N	NSX100H	NSX100S	NSX100L	
Breaking capacity (kA)	20	35	50	65	90	130	
Downstream							
	Breaking Capacity (kA)		Reinforced breaking capacity (kA)				
iC60N	6	15	15	20	20	20	20
iC60H	10	20	20	25	25	25	25
iC60L	≤ 25 A	20	—	—	25	25	25
	32-40 A	15	20	20	25	25	25
	50-63 A	10	—	—	—	—	—

Upstream: NSX160 — Downstream: iC60 — Ue: 440 V

Upstream	NSX160						
	NSX160B	NSX160F	NSX160N	NSX160H	NSX160S	NSX160L	
Breaking capacity (kA)	20	35	50	65	90	130	
Downstream							
	Breaking Capacity (kA)		Reinforced breaking capacity (kA)				
iC60N	6	15	15	20	20	20	20
iC60H	10	20	20	25	25	25	25
iC60L	≤ 25 A	20	—	—	25	25	25
	32-40 A	15	20	20	25	25	25
	50-63 A	10	—	—	—	—	—


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEX: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement A


Left Internal View




Front Internal View

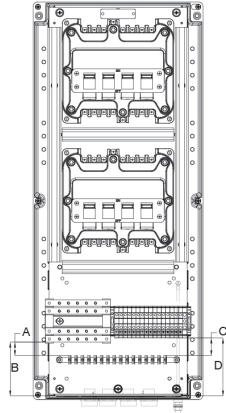

Right Internal View



Top Internal View



Dimensions in Millimeters (Inches)

A	26 (1.02)
B	102 (4.02)
C	33 (1.30)
D	109 (4.29)

Breaker Curve C	Branch Breakers				Main Lugs Only	Armored Entries			Non-Armored Entries				
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty		Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	8	4 x 63 Amp	M32	8	M20	M40	8	M20	—	—
2-Poles 16 Amp	—	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
2-Poles 16 Amp	X	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
2-Poles 16 Amp	X	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	—	—	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	—	—
3-Poles 16 Amp	—	X	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	—	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	X	—	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	—	—
3-Poles 16 Amp	X	X	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	—	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
4-Poles 16 Amp	—	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	—	—
4-Poles 16 Amp	X	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement A

Technical Information

Panel A Size	750 x 320 x 150 mm
Panel Weight	40 kg (88 lb)
Max. No. of Circuits	See Panel Arrangement Size Selection Table
Voltage	220-240/380-415, 440
Wiring	See Wiring Diagram Table

	Breaking Capacity in kA		
	Ratings in Amps	380/415 V	440 V ⑧
Mains	63 A	-	-
Bus-bar	100 A	-	-
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	100 A, 3 Ph, 5 W	-	-

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	35 mm ²	16	6 mm ²	—	—	—	PPAL068216C	PPAL068216C10N	
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PPAL064216C1	PPAL064216C20N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPAL064216C4	PPAL064216C30N	
4	35 mm ²	8	6 mm ²	8	2	2.5 mm ²	PPAL064216C5	PPAL064216C40N	
4	35 mm ²	8	6 mm ²	—	—	—	PPAL064216CG030	PPAL064216C50N	
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PPAL064216C1G030	PPAL064216C60N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPAL064216C4G030	PPAL064216C70N	
4	35 mm ²	4	6 mm ²	8	2	2.5 mm ²	PPAL062216C5G030	PPAL062216C80N	
3	35 mm ²	12	6 mm ²	—	—	—	PPAL054316C	PPAL054316C10N	
3	35 mm ²	12	6 mm ²	8	—	2.5 mm ²	PPAL054316C1	PPAL054316C20N	
3	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PPAL054316C4	PPAL054316C30N	
3	35 mm ²	6	6 mm ²	8	2	2.5 mm ²	PPAL052316C5	PPAL052316C40N	
3	35 mm ²	6	6 mm ²	—	—	—	PPAL052316CG030	PPAL052316C50N	
3	35 mm ²	6	6 mm ²	4	—	2.5 mm ²	PPAL052316C1G030	PPAL052316C60N	
3	35 mm ²	6	6 mm ²	—	2	2.5 mm ²	PPAL052316C4G030	PPAL052316C70N	
3	35 mm ²	6	6 mm ²	4	2	2.5 mm ²	PPAL052316C5G030	PPAL052316C80N	
4	35 mm ²	16	6 mm ²	—	—	—	PPAL064416C	PPAL064416C10N	
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PPAL062416C1	PPAL062416C20N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPAL062416C4	PPAL062416C30N	
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PPAL062416C5	PPAL062416C40N	
4	35 mm ²	8	6 mm ²	—	—	—	PPAL062416CG030	PPAL062416C50N	
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PPAL062416C1G030	PPAL062416C60N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPAL062416C4G030	PPAL062416C70N	
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PPAL062416C5G030	PPAL062416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number; example: PPBL048216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEX: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement A


Left Internal View




Front Internal View

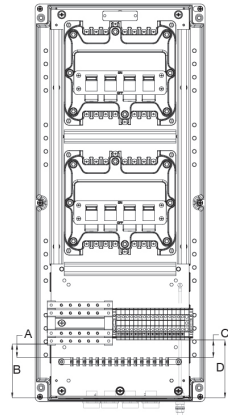

Right Internal View



Top Internal View



Dimensions in Millimeters (Inches)

A	26 (1.02)
B	102 (4.02)
C	33 (1.30)
D	109 (4.29)

Breaker Curve C	Branch Breakers				Armored Entries				Non-Armored Entries				
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Lugs Only	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	8	4 x 63 Amp	M32	8	M20	M40	8	M20	—	—
2-Poles 16 Amp	—	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
2-Poles 16 Amp	X	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
2-Poles 16 Amp	X	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	—	—	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	—	—
3-Poles 16 Amp	—	X	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	—	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	X	—	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	—	—
3-Poles 16 Amp	X	X	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	—	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
4-Poles 16 Amp	—	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	—	—
4-Poles 16 Amp	X	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement A

Technical Information

Panel A Size	790 x 330 x 150 mm		
Panel Weight	40 kg (88 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415, 440		
Wiring	See Wiring Diagram Table		
Breaking Capacity in kA			
	Ratings in Amps	380/415 V	440 V ⑥
Mains	63 A	-	-
Bus-bar	100 A	-	-
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	100 A, 3 Ph, 5 W	-	-

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		Auxiliary	Non-Armored ⑥	
				Qty ④	Qty ⑤		Complete Catalog No	Ordering Catalog No
4	35 mm ²	16	6 mm ²	—	—	—	PSAL068216C	PSAL068216C10N
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PSAL064216C1	PSAL064216C20N
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSAL064216C4	PSAL064216C30N
4	35 mm ²	8	6 mm ²	8	2	2.5 mm ²	PSAL064216C5	PSAL064216C40N
4	35 mm ²	8	6 mm ²	—	—	—	PSAL064216CG030	PSAL064216C50N
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PSAL064216C1G030	PSAL064216C60N
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSAL064216C4G030	PSAL064216C70N
4	35 mm ²	4	6 mm ²	8	2	2.5 mm ²	PSAL062216C5G030	PSAL062216C80N
3	35 mm ²	12	6 mm ²	—	—	—	PSAL054316C	PSAL054316C10N
3	35 mm ²	12	6 mm ²	8	—	2.5 mm ²	PSAL054316C1	PSAL054316C20N
3	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PSAL054316C4	PSAL054316C30N
3	35 mm ²	6	6 mm ²	8	2	2.5 mm ²	PSAL052316C5	PSAL052316C40N
3	35 mm ²	6	6 mm ²	—	—	—	PSAL052316CG030	PSAL052316C50N
3	35 mm ²	6	6 mm ²	4	—	2.5 mm ²	PSAL052316C1G030	PSAL052316C60N
3	35 mm ²	6	6 mm ²	—	2	2.5 mm ²	PSAL052316C4G030	PSAL052316C70N
3	35 mm ²	6	6 mm ²	4	2	2.5 mm ²	PSAL052316C5G030	PSAL052316C80N
4	35 mm ²	16	6 mm ²	—	—	—	PSAL064416C	PSAL064416C10N
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PSAL062416C1	PSAL062416C20N
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSAL062416C4	PSAL062416C30N
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PSAL062416C5	PSAL062416C40N
4	35 mm ²	8	6 mm ²	—	—	—	PSAL062416CG030	PSAL062416C50N
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PSAL062416C1G030	PSAL062416C60N
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSAL062416C4G030	PSAL062416C70N
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PSAL062416C5G030	PSAL062416C80N

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number; example: PPBL048216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement B


Left Internal View




Front Internal View

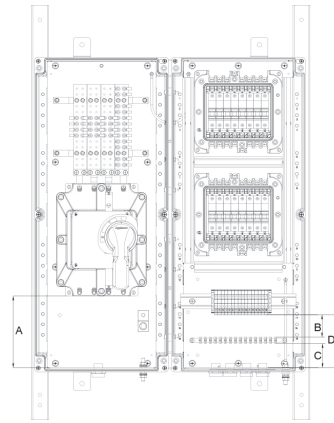

Right Internal View



Top Internal View



Dimensions in Millimeters (Inches)

A	17 (0.67)
B	53 (4.02)
C	57 (2.24)
D	126 (4.96)

Breaker Curve C	Branch Breakers				Armored Entries				Non-Armored Entries				
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	8	4 x 63 Amp	M32	8	M20	M40	8	M20	—	—
2-Poles 16 Amp	—	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
2-Poles 16 Amp	X	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
2-Poles 16 Amp	X	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	—	—	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	—	—
3-Poles 16 Amp	—	X	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	—	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	X	—	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	—	—
3-Poles 16 Amp	X	X	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	—	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
4-Poles 16 Amp	—	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	—	—
4-Poles 16 Amp	X	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25

Please note the following:

- For KAIC ratings for mains, busbar and branch circuit breakers, refer to Coordination Study Chart.
- FRP coupled enclosures are mounted on side and top of each other.
- Alternative arrangement are available as option, consult local sales representative.
- Number of circuits shown are non GFI and without auxiliary contacts equipped breakers.
- GFI and auxiliary contact equipped breakers number of circuits are determined as total number of circuits. Standard arrangements for all possibilities are listed in standard catalog pages

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement B

Technical Information

Panel B Size	750 x 640 x 230 mm		
Panel Weight	70 kg (154 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415, 440		
Wiring	See Wiring Diagram Table		
Breaking Capacity in kA			
	Ratings in Amps	380/415 V	440 V ⑧
Mains	100 A	25	20
Bus-bar	125 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	100 A, 3 Ph, 5 W	20	15

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	35 mm ²	16	6 mm ²	—	—	—	PPBM068216C	PPBM068216C10N	
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PPBM064216C1	PPBM064216C20N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPBM064216C4	PPBM064216C30N	
4	35 mm ²	8	6 mm ²	8	2	2.5 mm ²	PPBM064216C5	PPBM064216C40N	
4	35 mm ²	8	6 mm ²	—	—	—	PPBM064216CG030	PPBM064216C50N	
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PPBM064216C1G030	PPBM064216C60N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPBM064216C4G030	PPBM064216C70N	
4	35 mm ²	4	6 mm ²	8	2	2.5 mm ²	PPBM062216C5G030	PPBM062216C80N	
3	35 mm ²	12	6 mm ²	—	—	—	PPBM054316C	PPBM054316C10N	
3	35 mm ²	12	6 mm ²	8	—	2.5 mm ²	PPBM054316C1	PPBM054316C20N	
3	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PPBM054316C4	PPBM054316C30N	
3	35 mm ²	6	6 mm ²	8	2	2.5 mm ²	PPBM052316C5	PPBM052316C40N	
3	35 mm ²	6	6 mm ²	—	—	—	PPBM052316CG030	PPBM052316C50N	
3	35 mm ²	6	6 mm ²	4	—	2.5 mm ²	PPBM052316C1G030	PPBM052316C60N	
3	35 mm ²	6	6 mm ²	—	2	2.5 mm ²	PPBM052316C4G030	PPBM052316C70N	
3	35 mm ²	6	6 mm ²	4	2	2.5 mm ²	PPBM052316C5G030	PPBM052316C80N	
4	35 mm ²	16	6 mm ²	—	—	—	PPBM064416C	PPBM064416C10N	
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PPBM062416C1	PPBM062416C20N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPBM062416C4	PPBM062416C30N	
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PPBM062416C5	PPBM062416C40N	
4	35 mm ²	8	6 mm ²	—	—	—	PPBM062416CG030	PPBM062416C50N	
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PPBM062416C1G030	PPBM062416C60N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PPBM062416C4G030	PPBM062416C70N	
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PPBM062416C5G030	PPBM062416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number, example: PPBM048216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEX: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement B


Left Internal View

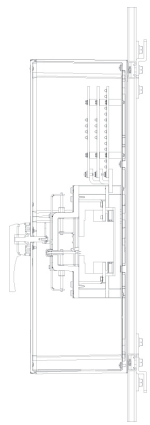


Front Internal View

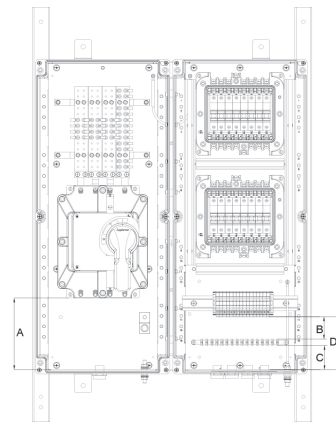

Right Internal View



Top Internal View



Dimensions in Millimeters (Inches)

A	17 (0.67)
B	53 (4.02)
C	57 (2.24)
D	126 (4.96)

Breaker Curve C	Branch Breakers				Armored Entries				Non-Armored Entries				
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	8	4 x 63 Amp	M32	8	M20	M40	8	M20	—	—
2-Poles 16 Amp	—	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	—	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
2-Poles 16 Amp	X	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
2-Poles 16 Amp	X	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
2-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	—	—	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	—	—
3-Poles 16 Amp	—	X	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	—	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	—	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M25	M25
3-Poles 16 Amp	X	—	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	—	—
3-Poles 16 Amp	X	X	—	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	—	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
3-Poles 16 Amp	X	X	X	2	3 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
4-Poles 16 Amp	—	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	—	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	—	—
4-Poles 16 Amp	X	X	—	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	—	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25
4-Poles 16 Amp	X	X	X	2	4 x 63 Amp	M32	2	M20	M40	2	M20	M20	M25

Please note the following:

- For KAIC ratings for mains, busbar and branch circuit breakers, refer to Coordination Study Chart.
- FRP coupled enclosures are mounted on side and top of each other.
- Alternative arrangement are available as option, consult local sales representative.
- Number of circuits shown are non GFI and without auxiliary contacts equipped breakers.
- GFI and auxiliary contact equipped breakers number of circuits are determined as total number of circuits. Standard arrangements for all possibilities are listed in standard catalog pages

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement B

Technical Information

Panel B Size	790 x 660 x 230 mm		
Panel Weight	70 kg (154 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415, 440		
Wiring	See Wiring Diagram Table		
	Breaking Capacity in kA		
	Ratings in Amps	380/415 V	440 V ⑧
Mains	100 A	25	20
Bus-bar	125 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	100 A, 3 Ph, 5 W	20	15

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	35 mm ²	16	6 mm ²	—	—	—	PSBM068216C	PSBM068216C10N	
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PSBM064216C1	PSBM064216C20N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSBM064216C4	PSBM064216C30N	
4	35 mm ²	8	6 mm ²	8	2	2.5 mm ²	PSBM064216C5	PSBM064216C40N	
4	35 mm ²	8	6 mm ²	—	—	—	PSBM064216CG030	PSBM064216C50N	
4	35 mm ²	8	6 mm ²	8	—	2.5 mm ²	PSBM064216C1G030	PSBM064216C60N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSBM064216C4G030	PSBM064216C70N	
4	35 mm ²	4	6 mm ²	8	2	2.5 mm ²	PSBM062216C5G030	PSBM062216C80N	
3	35 mm ²	12	6 mm ²	—	—	—	PSBM054316C	PSBM054316C10N	
3	35 mm ²	12	6 mm ²	8	—	2.5 mm ²	PSBM054316C1	PSBM054316C20N	
3	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PSBM054316C4	PSBM054316C30N	
3	35 mm ²	6	6 mm ²	8	2	2.5 mm ²	PSBM052316C5	PSBM052316C40N	
3	35 mm ²	6	6 mm ²	—	—	—	PSBM052316CG030	PSBM052316C50N	
3	35 mm ²	6	6 mm ²	4	—	2.5 mm ²	PSBM052316C1G030	PSBM052316C60N	
3	35 mm ²	6	6 mm ²	—	2	2.5 mm ²	PSBM052316C4G030	PSBM052316C70N	
3	35 mm ²	6	6 mm ²	4	2	2.5 mm ²	PSBM052316C5G030	PSBM052316C80N	
4	35 mm ²	16	6 mm ²	—	—	—	PSBM064416C	PSBM064416C10N	
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PSBM062416C1	PSBM062416C20N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSBM062416C4	PSBM062416C30N	
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PSBM062416C5	PSBM062416C40N	
4	35 mm ²	8	6 mm ²	—	—	—	PSBM062416CG030	PSBM062416C50N	
4	35 mm ²	8	6 mm ²	4	—	2.5 mm ²	PSBM062416C1G030	PSBM062416C60N	
4	35 mm ²	8	6 mm ²	—	2	2.5 mm ²	PSBM062416C4G030	PSBM062416C70N	
4	35 mm ²	8	6 mm ²	4	2	2.5 mm ²	PSBM062416C5G030	PSBM062416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number, example: PPBM048216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.

Distribution Equipment


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement C


Left Internal View




Front Internal View

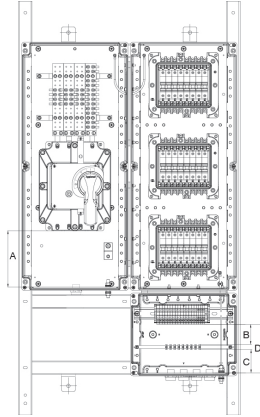

Right Internal View



Top Internal View



Dimensions in Millimeters (Inches)

A	170 (6.69)
B	61 (2.40)
C	70 (2.76)
D	147 (5.79)

Breaker Curve C	Branch Breakers				Armored Entries				Non-Armored Entries				
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	—	—
2-Poles 16 Amp	—	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
2-Poles 16 Amp	—	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
2-Poles 16 Amp	—	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
2-Poles 16 Amp	X	—	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	—	—
2-Poles 16 Amp	X	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
2-Poles 16 Amp	X	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
2-Poles 16 Amp	X	X	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	—	—	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	—	—
3-Poles 16 Amp	—	X	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	—	—	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
3-Poles 16 Amp	—	X	X	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	X	—	—	3	3 x 63 Amp	M32	3	M20	M40	3	M20	—	—
3-Poles 16 Amp	X	X	—	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	X	—	X	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	X	X	X	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	—	—	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	—	—
4-Poles 16 Amp	—	X	—	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	—	—	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	—	X	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	X	—	—	3	4 x 63 Amp	M32	3	M20	M40	3	M20	—	—
4-Poles 16 Amp	X	X	—	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	X	—	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	X	X	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement C

Technical Information

Panel C Size	1000 x 640 x 230 mm
Panel Weight	80 kg (176 lb)
Max. No. of Circuits	See Panel Arrangement Size Selection Table
Voltage	220-240/380-415, 440
Wiring	See Wiring Diagram Table

	Breaking Capacity in kA		
	Ratings in Amps	380/415 V	440 V ⑥
Mains	125 A	25	20
Bus-bar	125 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	125 A, 3 Ph, 5 W	20	15

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	50 mm ²	24	6 mm ²	—	—	—	PPCM1212216C	PPCM1212216C10N	
4	35 mm ²	12	6 mm ²	12	—	2.5 mm ²	PPCM066216C1	PPCM066216C20N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PPCM066216C4	PPCM066216C30N	
4	35 mm ²	12	6 mm ²	12	2	2.5 mm ²	PPCM066216C5	PPCM066216C40N	
4	35 mm ²	12	6 mm ²	—	—	—	PPCM066216CG030	PPCM066216C50N	
4	35 mm ²	12	6 mm ²	12	—	2.5 mm ²	PPCM066216C1G030	PPCM066216C60N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PPCM066216C4G030	PPCM066216C70N	
4	35 mm ²	6	6 mm ²	12	2	2.5 mm ²	PPCM063216C5G030	PPCM063216C80N	
3	35 mm ²	18	6 mm ²	—	—	—	PPCM056316C	PPCM056316C10N	
3	35 mm ²	18	6 mm ²	12	—	2.5 mm ²	PPCM056316C1	PPCM056316C20N	
3	35 mm ²	18	6 mm ²	—	2	2.5 mm ²	PPCM056316C4	PPCM056316C30N	
3	35 mm ²	9	6 mm ²	6	2	2.5 mm ²	PPCM053316C5	PPCM053316C40N	
3	35 mm ²	9	6 mm ²	—	—	—	PPCM053316CG030	PPCM053316C50N	
3	35 mm ²	9	6 mm ²	6	—	2.5 mm ²	PPCM053316C1G030	PPCM053316C60N	
3	35 mm ²	9	6 mm ²	—	2	2.5 mm ²	PPCM053316C4G030	PPCM053316C70N	
3	35 mm ²	9	6 mm ²	6	2	2.5 mm ²	PPCM053316C5G030	PPCM053316C80N	
4	35 mm ²	24	6 mm ²	—	—	—	PPCM066416C	PPCM066416C10N	
4	35 mm ²	12	6 mm ²	6	—	2.5 mm ²	PPCM063416C1	PPCM063416C20N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PPCM063416C4	PPCM063416C30N	
4	35 mm ²	12	6 mm ²	6	2	2.5 mm ²	PPCM063416C5	PPCM063416C40N	
4	35 mm ²	12	6 mm ²	—	—	—	PPCM063416CG030	PPCM063416C50N	
4	35 mm ²	12	6 mm ²	6	—	2.5 mm ²	PPCM063416C1G030	PPCM063416C60N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PPCM063416C4G030	PPCM063416C70N	
4	35 mm ²	12	6 mm ²	6	2	2.5 mm ²	PPCM063416C5G030	PPCM063416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number; example: PPCM0812216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement C


Left Internal View




Front Internal View

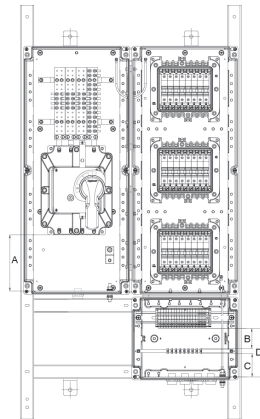

Right Internal View



Top Internal View



Dimensions in Millimeters (Inches)

A	170 (6.69)
B	61 (2.40)
C	70 (2.76)
D	147 (5.79)

Breaker Curve C	Branch Breakers				Armored Entries			Non-Armored Entries					
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	—	—
2-Poles 16 Amp	—	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
2-Poles 16 Amp	—	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
2-Poles 16 Amp	—	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
2-Poles 16 Amp	X	—	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	—	—
2-Poles 16 Amp	X	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
2-Poles 16 Amp	X	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
2-Poles 16 Amp	X	X	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	—	—	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	—	—
3-Poles 16 Amp	—	X	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	—	—	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
3-Poles 16 Amp	—	X	X	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	X	—	—	3	3 x 63 Amp	M32	3	M20	M40	3	M20	—	—
3-Poles 16 Amp	X	X	—	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	X	—	X	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
3-Poles 16 Amp	X	X	X	3	3 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	—	—	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	—	—
4-Poles 16 Amp	—	X	—	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	—	—	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	—	X	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	X	—	—	3	4 x 63 Amp	M32	3	M20	M40	3	M20	—	—
4-Poles 16 Amp	X	X	—	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	X	—	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25
4-Poles 16 Amp	X	X	X	3	4 x 63 Amp	M32	3	M20	M40	3	M20	M20	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement C

Technical Information

Panel C Size	1080 x 660 x 230 mm		
Panel Weight	80 kg (176 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415, 440		
Wiring	See Wiring Diagram Table		
Breaking Capacity in kA			
	Ratings in Amps	380/415 V	440 V ⑥
Mains	125 A	25	20
Bus-bar	125 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	125 A, 3 Ph, 5 W	20	15

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	50 mm ²	24	6 mm ²	—	—	—	PSCM1212216C	PSCM1212216C10N	
4	35 mm ²	12	6 mm ²	12	—	2.5 mm ²	PSCM066216C1	PSCM066216C20N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PSCM066216C4	PSCM066216C30N	
4	35 mm ²	12	6 mm ²	12	2	2.5 mm ²	PSCM066216C5	PSCM066216C40N	
4	35 mm ²	12	6 mm ²	—	—	—	PSCM066216CG030	PSCM066216C50N	
4	35 mm ²	12	6 mm ²	12	—	2.5 mm ²	PSCM066216C1G030	PSCM066216C60N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PSCM066216C4G030	PSCM066216C70N	
4	35 mm ²	6	6 mm ²	12	2	2.5 mm ²	PSCM063216C5G030	PSCM063216C80N	
3	35 mm ²	18	6 mm ²	—	—	—	PSCM056316C	PSCM056316C10N	
3	35 mm ²	18	6 mm ²	12	—	2.5 mm ²	PSCM056316C1	PSCM056316C20N	
3	35 mm ²	18	6 mm ²	—	2	2.5 mm ²	PSCM056316C4	PSCM056316C30N	
3	35 mm ²	9	6 mm ²	6	2	2.5 mm ²	PSCM053316C5	PSCM053316C40N	
3	35 mm ²	9	6 mm ²	—	—	—	PSCM053316CG030	PSCM053316C50N	
3	35 mm ²	9	6 mm ²	6	—	2.5 mm ²	PSCM053316C1G030	PSCM053316C60N	
3	35 mm ²	9	6 mm ²	—	2	2.5 mm ²	PSCM053316C4G030	PSCM053316C70N	
3	35 mm ²	9	6 mm ²	6	2	2.5 mm ²	PSCM053316C5G030	PSCM053316C80N	
4	35 mm ²	24	6 mm ²	—	—	—	PSCM066416C	PSCM066416C10N	
4	35 mm ²	12	6 mm ²	6	—	2.5 mm ²	PSCM063416C1	PSCM063416C20N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PSCM063416C4	PSCM063416C30N	
4	35 mm ²	12	6 mm ²	6	2	2.5 mm ²	PSCM063416C5	PSCM063416C40N	
4	35 mm ²	12	6 mm ²	—	—	—	PSCM063416CG030	PSCM063416C50N	
4	35 mm ²	12	6 mm ²	6	—	2.5 mm ²	PSCM063416C1G030	PSCM063416C60N	
4	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PSCM063416C4G030	PSCM063416C70N	
4	35 mm ²	12	6 mm ²	6	2	2.5 mm ²	PSCM063416C5G030	PSCM063416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number, example: PSCM0812216C10A.

⑦ For higher kA rating please consult your local sales representative.


⑧ Without GFI.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement D

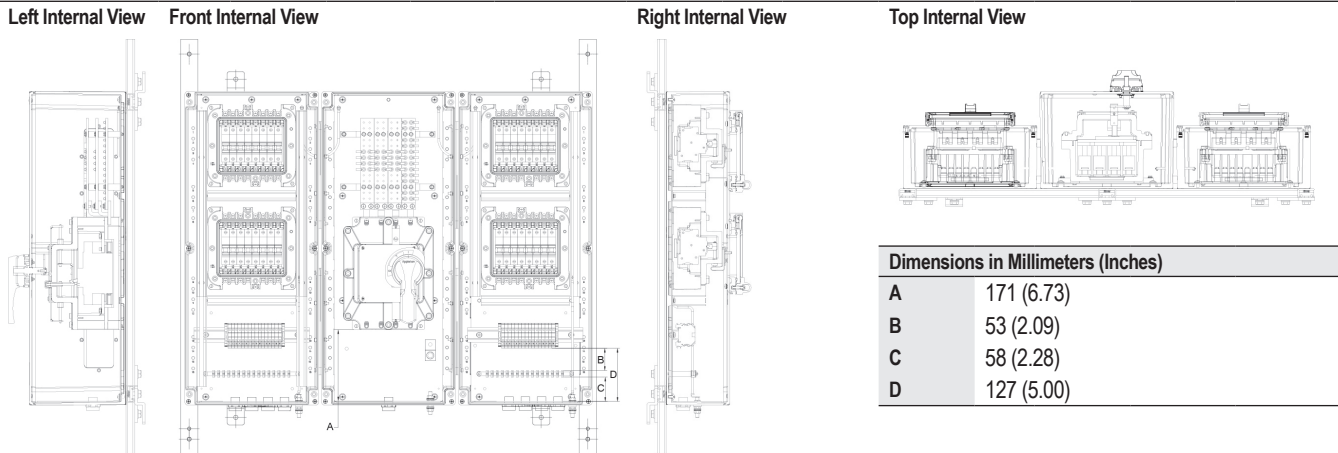

Breaker Curve C	Branch Breakers				Armored Entries			Non-Armored Entries					
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	16	4 x 160 Amp	M50	16	M20	M50	16	M20	—	—
2-Poles 16 Amp	—	X	—	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
2-Poles 16 Amp	—	—	X	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M20	M25
2-Poles 16 Amp	—	X	X	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
2-Poles 16 Amp	X	—	—	8	4 x 100 Amp	M40	8	M20	M40	8	M20	—	—
2-Poles 16 Amp	X	X	—	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
2-Poles 16 Amp	X	—	X	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M20	M25
2-Poles 16 Amp	X	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
3-Poles 16 Amp	—	—	—	8	3 x 100 Amp	M40	8	M20	M40	8	M20	—	—
3-Poles 16 Amp	—	X	—	8	3 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
3-Poles 16 Amp	—	—	X	8	3 x 100 Amp	M40	8	M20	M40	8	M20	M20	M25
3-Poles 16 Amp	—	X	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
3-Poles 16 Amp	X	—	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	—	—
3-Poles 16 Amp	X	X	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	X	—	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	X	X	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
4-Poles 16 Amp	—	—	—	8	4 x 63 Amp	M32	8	M20	M40	8	M20	—	—
4-Poles 16 Amp	—	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	—	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	—	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
4-Poles 16 Amp	X	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
4-Poles 16 Amp	X	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	X	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	X	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement D

Technical Information

Panel D Size	750 x 960 x 230 mm		
Panel Weight	120 kg (265 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415, 440		
Wiring	See Wiring Diagram Table		
Breaking Capacity in kA			
	Ratings in Amps	380/415 V	440 V ⑧
Mains	160 A	25	20
Bus-bar	160 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	160 A, 3 Ph, 5 W	20	15

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	70 mm ²	32	6 mm ²	—	—	—	PPDM1416216C	PPDM1416216C10N	
4	50 mm ²	16	6 mm ²	16	—	2.5 mm ²	PPDM108216C1	PPDM108216C20N	
4	50 mm ²	16	6 mm ²	—	2	2.5 mm ²	PPDM108216C4	PPDM108216C30N	
4	50 mm ²	16	6 mm ²	16	2	2.5 mm ²	PPDM108216C5	PPDM108216C40N	
4	50 mm ²	16	6 mm ²	—	—	—	PPDM108216CG030	PPDM108216C50N	
4	50 mm ²	16	6 mm ²	16	—	2.5 mm ²	PPDM108216C1G030	PPDM108216C60N	
4	50 mm ²	16	6 mm ²	—	2	2.5 mm ²	PPDM108216C4G030	PPDM108216C70N	
4	35 mm ²	8	6 mm ²	8	2	2.5 mm ²	PPDM064216C5G030	PPDM064216C80N	
3	50 mm ²	24	6 mm ²	—	—	—	PPDM098316C	PPDM098316C10N	
3	50 mm ²	24	6 mm ²	16	—	2.5 mm ²	PPDM098316C1	PPDM098316C20N	
3	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PPDM098316C4	PPDM098316C30N	
3	35 mm ²	12	6 mm ²	8	2	2.5 mm ²	PPDM054316C5	PPDM054316C40N	
3	35 mm ²	12	6 mm ²	—	—	—	PPDM054316CG030	PPDM054316C50N	
3	35 mm ²	12	6 mm ²	8	—	2.5 mm ²	PPDM054316C1G030	PPDM054316C60N	
3	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PPDM054316C4G030	PPDM054316C70N	
3	35 mm ²	12	6 mm ²	8	2	2.5 mm ²	PPDM054316C5G030	PPDM054316C80N	
4	35 mm ²	32	6 mm ²	—	—	—	PPDM068416C	PPDM068416C10N	
4	35 mm ²	16	6 mm ²	8	—	2.5 mm ²	PPDM064416C1	PPDM064416C20N	
4	35 mm ²	16	6 mm ²	—	2	2.5 mm ²	PPDM064416C4	PPDM064416C30N	
4	35 mm ²	16	6 mm ²	8	2	2.5 mm ²	PPDM064416C5	PPDM064416C40N	
4	35 mm ²	16	6 mm ²	—	—	—	PPDM064416CG030	PPDM064416C50N	
4	35 mm ²	16	6 mm ²	8	—	2.5 mm ²	PPDM064416C1G030	PPDM064416C60N	
4	35 mm ²	16	6 mm ²	—	2	2.5 mm ²	PPDM064416C4G030	PPDM064416C70N	
4	35 mm ²	16	6 mm ²	8	2	2.5 mm ²	PPDM064416C5G030	PPDM064416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number; example: PPDM1016216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22


Stainless Steel Panel Arrangement D

Left Internal View

Front Internal View

Right Internal View

Top Internal View

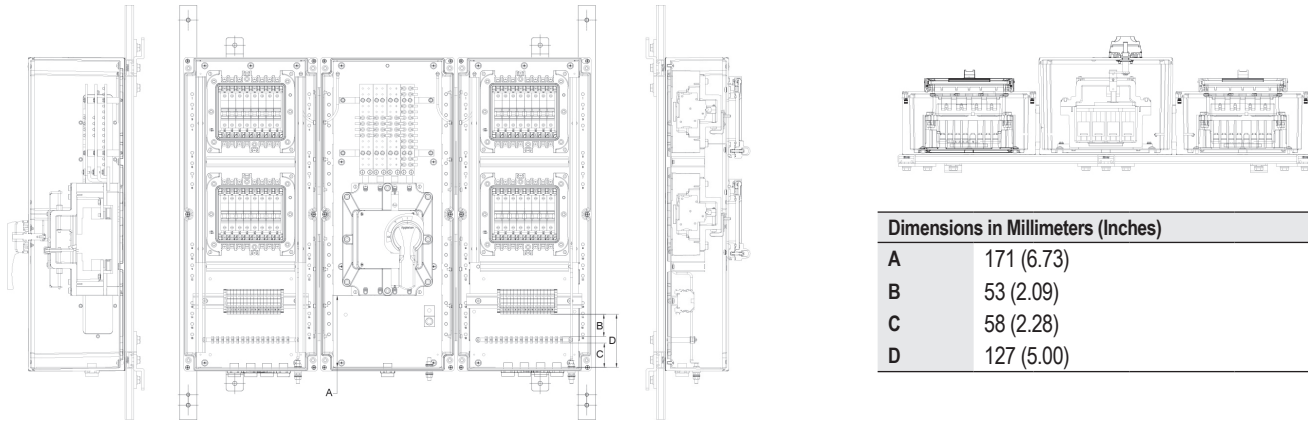

Dimensions in Millimeters (Inches)	
A	171 (6.73)
B	53 (2.09)
C	58 (2.28)
D	127 (5.00)

Breaker Curve C	Branch Breakers				Armored Entries			Non-Armored Entries					
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	16	4 x 160 Amp	M50	16	M20	M50	16	M20	—	—
2-Poles 16 Amp	—	X	—	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
2-Poles 16 Amp	—	—	X	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M20	M25
2-Poles 16 Amp	—	X	X	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
2-Poles 16 Amp	X	—	—	8	4 x 100 Amp	M40	8	M20	M40	8	M20	—	—
2-Poles 16 Amp	X	X	—	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
2-Poles 16 Amp	X	—	X	8	4 x 100 Amp	M40	8	M20	M40	8	M20	M20	M25
2-Poles 16 Amp	X	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
3-Poles 16 Amp	—	—	—	8	3 x 100 Amp	M40	8	M20	M40	8	M20	—	—
3-Poles 16 Amp	—	X	—	8	3 x 100 Amp	M40	8	M20	M40	8	M20	M25	M25
3-Poles 16 Amp	—	—	X	8	3 x 100 Amp	M40	8	M20	M40	8	M20	M20	M25
3-Poles 16 Amp	—	X	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
3-Poles 16 Amp	X	—	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	—	—
3-Poles 16 Amp	X	X	—	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	X	—	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
3-Poles 16 Amp	X	X	X	4	3 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
4-Poles 16 Amp	—	—	—	8	4 x 63 Amp	M32	8	M20	M40	8	M20	—	—
4-Poles 16 Amp	—	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	—	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	—	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25
4-Poles 16 Amp	X	—	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	—	—
4-Poles 16 Amp	X	X	—	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	X	—	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M20	M25
4-Poles 16 Amp	X	X	X	4	4 x 63 Amp	M32	4	M20	M40	4	M20	M25	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement D

Technical Information			
Panel D Size	790 x 990 x 230 mm		
Panel Weight	120 kg (265 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415, 440		
Wiring	See Wiring Diagram Table		
Breaking Capacity in kA			
	Ratings in Amps	380/415 V	440 V ⑧
Mains	160 A	25	20
Bus-bar	160 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	160 A, 3 Ph, 5 W	20	15

Terminals ①										
Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Auxiliary	Non-Armored ⑥	
				Qty ④	Qty ⑤	Complete Catalog No	Ordering Catalog No			
4	70 mm ²	32	6 mm ²	—	—	—	PSDM1416216C	PSDM1416216C10N		
4	50 mm ²	16	6 mm ²	16	—	2.5 mm ²	PSDM108216C1	PSDM108216C20N		
4	50 mm ²	16	6 mm ²	—	2	2.5 mm ²	PSDM108216C4	PSDM108216C30N		
4	50 mm ²	16	6 mm ²	16	2	2.5 mm ²	PSDM108216C5	PSDM108216C40N		
4	50 mm ²	16	6 mm ²	—	—	—	PSDM108216CG030	PSDM108216C50N		
4	50 mm ²	16	6 mm ²	16	—	2.5 mm ²	PSDM108216C1G030	PSDM108216C60N		
4	50 mm ²	16	6 mm ²	—	2	2.5 mm ²	PSDM108216C4G030	PSDM108216C70N		
4	35 mm ²	8	6 mm ²	8	2	2.5 mm ²	PSDM064216C5G030	PSDM064216C80N		
3	50 mm ²	24	6 mm ²	—	—	—	PSDM098316C	PSDM098316C10N		
3	50 mm ²	24	6 mm ²	16	—	2.5 mm ²	PSDM098316C1	PSDM098316C20N		
3	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PSDM098316C4	PSDM098316C30N		
3	35 mm ²	12	6 mm ²	8	2	2.5 mm ²	PSDM054316C5	PSDM054316C40N		
3	35 mm ²	12	6 mm ²	—	—	—	PSDM054316CG030	PSDM054316C50N		
3	35 mm ²	12	6 mm ²	8	—	2.5 mm ²	PSDM054316C1G030	PSDM054316C60N		
3	35 mm ²	12	6 mm ²	—	2	2.5 mm ²	PSDM054316C4G030	PSDM054316C70N		
3	35 mm ²	12	6 mm ²	8	2	2.5 mm ²	PSDM054316C5G030	PSDM054316C80N		
4	35 mm ²	32	6 mm ²	—	—	—	PSDM068416C	PSDM068416C10N		
4	35 mm ²	16	6 mm ²	8	—	2.5 mm ²	PSDM064416C1	PSDM064416C20N		
4	35 mm ²	16	6 mm ²	—	2	2.5 mm ²	PSDM064416C4	PSDM064416C30N		
4	35 mm ²	16	6 mm ²	8	2	2.5 mm ²	PSDM064416C5	PSDM064416C40N		
4	35 mm ²	16	6 mm ²	—	—	—	PSDM064416CG030	PSDM064416C50N		
4	35 mm ²	16	6 mm ²	8	—	2.5 mm ²	PSDM064416C1G030	PSDM064416C60N		
4	35 mm ²	16	6 mm ²	—	2	2.5 mm ²	PSDM064416C4G030	PSDM064416C70N		
4	35 mm ²	16	6 mm ²	8	2	2.5 mm ²	PSDM064416C5G030	PSDM064416C80N		

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number; example: PPD1016216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEX: Zones 1 and 2 – 21 and 22


Fiberglass Reinforced Polyester (FRP) Panel Arrangement E

Left Internal View

Front Internal View

Right Internal View

Top Internal View

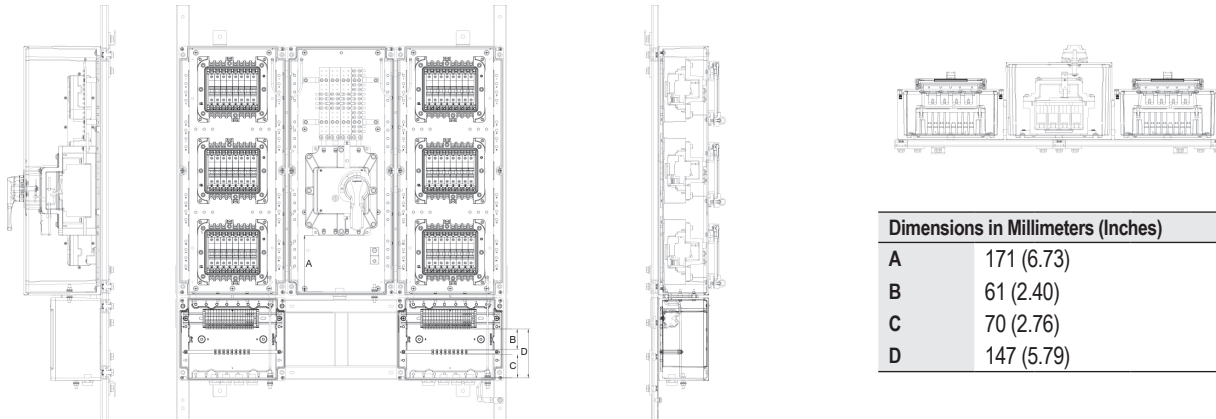

Dimensions in Millimeters (Inches)	
A	171 (6.73)
B	61 (2.40)
C	70 (2.76)
D	147 (5.79)

Breaker Curve C	Branch Breakers				Armored Entries			Non-Armored Entries					
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	24	4 x 200 Amp	M63	24	M20	M63	24	M20	—	—
2-Poles 16 Amp	—	X	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
2-Poles 16 Amp	—	—	X	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M20	M25
2-Poles 16 Amp	—	X	X	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
2-Poles 16 Amp	X	—	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	—	—
2-Poles 16 Amp	X	X	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
2-Poles 16 Amp	X	—	X	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M20	M25
2-Poles 16 Amp	X	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	—	—	—	12	3 x 125 Amp	M40	12	M20	M40	12	M20	—	—
3-Poles 16 Amp	—	X	—	12	3 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
3-Poles 16 Amp	—	—	X	12	3 x 125 Amp	M40	12	M20	M40	12	M20	M20	M25
3-Poles 16 Amp	—	X	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	X	—	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	—	—
3-Poles 16 Amp	X	X	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	X	—	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
3-Poles 16 Amp	X	X	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	—	—	—	12	4 x 63 Amp	M32	12	M20	M40	12	M20	—	—
4-Poles 16 Amp	—	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	—	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
4-Poles 16 Amp	—	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	X	—	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	—	—
4-Poles 16 Amp	X	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	X	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
4-Poles 16 Amp	X	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement E

Technical Information

Panel E Size	1000 x 960 x 230 mm		
Panel Weight	145 kg (320 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415		
Wiring	See Wiring Diagram Table		
	Breaking Capacity in kA		
	Ratings in Amps	380/415 V	440 V ⑧
Mains	200 A	25	20
Bus-bar	250 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	200 A, 3 Ph, 5 W	20	-

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	120 mm ²	48	6 mm ²	—	—	—	PPEM1624216C	PPEM1624216C10N	
4	50 mm ²	24	6 mm ²	24	—	2.5 mm ²	PPEM1212216C1	PPEM1212216C20N	
4	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PPEM1212216C4	PPEM1212216C30N	
4	50 mm ²	24	6 mm ²	24	2	2.5 mm ²	PPEM1212216C5	PPEM1212216C40N	
4	50 mm ²	24	6 mm ²	—	—	—	PPEM1212216CG030	PPEM1212216C50N	
4	50 mm ²	24	6 mm ²	24	—	2.5 mm ²	PPEM1212216C1G030	PPEM1212216C60N	
4	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PPEM1212216C4G030	PPEM1212216C70N	
4	35 mm ²	12	6 mm ²	12	2	2.5 mm ²	PPEM066216C5G030	PPEM066216C80N	
3	50 mm ²	24	6 mm ²	—	—	—	PPEM1112316C	PPEM1112316C10N	
3	50 mm ²	24	6 mm ²	24	—	2.5 mm ²	PPEM1112316C1	PPEM1112316C20N	
3	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PPEM1112316C4	PPEM1112316C30N	
3	35 mm ²	18	6 mm ²	12	2	2.5 mm ²	PPEM056316C5	PPEM056316C40N	
3	35 mm ²	18	6 mm ²	—	—	—	PPEM056316CG030	PPEM056316C50N	
3	35 mm ²	18	6 mm ²	12	—	2.5 mm ²	PPEM056316C1G030	PPEM056316C60N	
3	35 mm ²	18	6 mm ²	—	2	2.5 mm ²	PPEM056316C4G030	PPEM056316C70N	
3	35 mm ²	18	6 mm ²	12	2	2.5 mm ²	PPEM056316C5G030	PPEM056316C80N	
4	35 mm ²	48	6 mm ²	—	—	—	PPEM0612416C	PPEM0612416C10N	
4	35 mm ²	24	6 mm ²	12	—	2.5 mm ²	PPEM066416C1	PPEM066416C20N	
4	35 mm ²	24	6 mm ²	—	2	2.5 mm ²	PPEM066416C4	PPEM066416C30N	
4	35 mm ²	24	6 mm ²	12	2	2.5 mm ²	PPEM066416C5	PPEM066416C40N	
4	35 mm ²	24	6 mm ²	—	—	—	PPEM066416CG030	PPEM066416C50N	
4	35 mm ²	24	6 mm ²	12	—	2.5 mm ²	PPEM066416C1G030	PPEM066416C60N	
4	35 mm ²	24	6 mm ²	—	2	2.5 mm ²	PPEM066416C4G030	PPEM066416C70N	
4	35 mm ²	24	6 mm ²	12	2	2.5 mm ²	PPEM066416C5G030	PPEM066416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number; example: PPEM1224216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22


Stainless Steel Panel Arrangement E

Left Internal View

Front Internal View

Right Internal View

Top Internal View

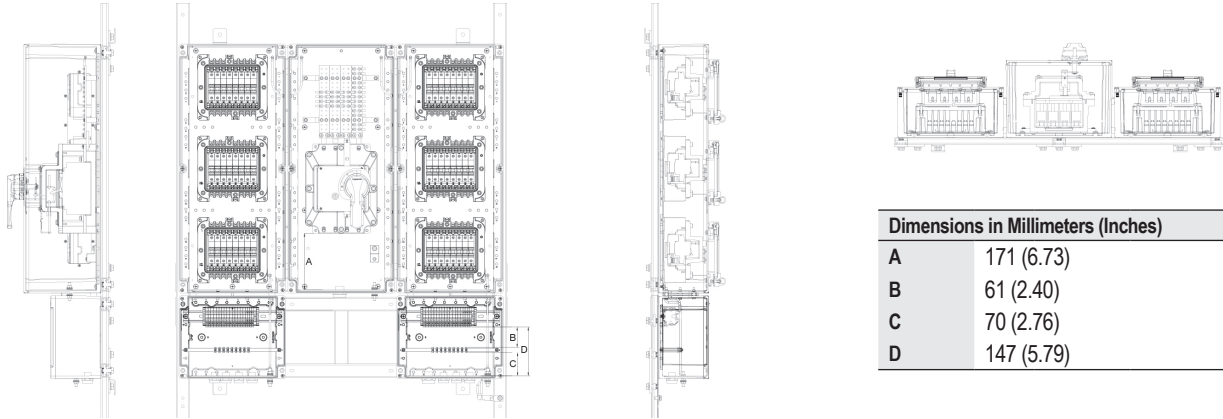

Dimensions in Millimeters (Inches)	
A	171 (6.73)
B	61 (2.40)
C	70 (2.76)
D	147 (5.79)

Breaker Curve C	Branch Breakers				Armored Entries			Non-Armored Entries					
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	24	4 x 200 Amp	M63	24	M20	M63	24	M20	—	—
2-Poles 16 Amp	—	X	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
2-Poles 16 Amp	—	—	X	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M20	M25
2-Poles 16 Amp	—	X	X	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
2-Poles 16 Amp	X	—	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	—	—
2-Poles 16 Amp	X	X	—	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
2-Poles 16 Amp	X	—	X	12	4 x 125 Amp	M40	12	M20	M40	12	M20	M20	M25
2-Poles 16 Amp	X	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	—	—	—	12	3 x 125 Amp	M40	12	M20	M40	12	M20	—	—
3-Poles 16 Amp	—	X	—	12	3 x 125 Amp	M40	12	M20	M40	12	M20	M32	M32
3-Poles 16 Amp	—	—	X	12	3 x 125 Amp	M40	12	M20	M40	12	M20	M20	M25
3-Poles 16 Amp	—	X	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	X	—	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	—	—
3-Poles 16 Amp	X	X	—	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
3-Poles 16 Amp	X	—	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
3-Poles 16 Amp	X	X	X	6	3 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	—	—	—	12	4 x 63 Amp	M32	12	M20	M40	12	M20	—	—
4-Poles 16 Amp	—	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	—	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
4-Poles 16 Amp	—	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	X	—	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	—	—
4-Poles 16 Amp	X	X	—	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25
4-Poles 16 Amp	X	—	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M20	M25
4-Poles 16 Amp	X	X	X	6	4 x 63 Amp	M32	6	M20	M40	6	M20	M25	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement E

Technical Information

Panel E Size	1080 x 990 x 230 mm		
Panel Weight	145 kg (320 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415		
Wiring	See Wiring Diagram Table		
	Breaking Capacity in kA		
	Ratings in Amps	380/415 V	440 V ⑧
Mains	200 A	25	20
Bus-bar	250 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	200 A, 3 Ph, 5 W	20	-

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	120 mm ²	48	6 mm ²	—	—	—	PSEM1624216C	PSEM1624216C10N	
4	50 mm ²	24	6 mm ²	24	—	2.5 mm ²	PSEM1212216C1	PSEM1212216C20N	
4	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PSEM1212216C4	PSEM1212216C30N	
4	50 mm ²	24	6 mm ²	24	2	2.5 mm ²	PSEM1212216C5	PSEM1212216C40N	
4	50 mm ²	24	6 mm ²	—	—	—	PSEM1212216CG030	PSEM1212216C50N	
4	50 mm ²	24	6 mm ²	24	—	2.5 mm ²	PSEM1212216C1G030	PSEM1212216C60N	
4	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PSEM1212216C4G030	PSEM1212216C70N	
4	35 mm ²	12	6 mm ²	12	2	2.5 mm ²	PSEM066216C5G030	PSEM066216C80N	
3	50 mm ²	24	6 mm ²	—	—	—	PSEM1112316C	PSEM1112316C10N	
3	50 mm ²	24	6 mm ²	24	—	2.5 mm ²	PSEM1112316C1	PSEM1112316C20N	
3	50 mm ²	24	6 mm ²	—	2	2.5 mm ²	PSEM1112316C4	PSEM1112316C30N	
3	35 mm ²	18	6 mm ²	12	2	2.5 mm ²	PSEM056316C5	PSEM056316C40N	
3	35 mm ²	18	6 mm ²	—	—	—	PSEM056316CG030	PSEM056316C50N	
3	35 mm ²	18	6 mm ²	12	—	2.5 mm ²	PSEM056316C1G030	PSEM056316C60N	
3	35 mm ²	18	6 mm ²	—	2	2.5 mm ²	PSEM056316C4G030	PSEM056316C70N	
3	35 mm ²	18	6 mm ²	12	2	2.5 mm ²	PSEM056316C5G030	PSEM056316C80N	
4	35 mm ²	48	6 mm ²	—	—	—	PSEM0612416C	PSEM0612416C10N	
4	35 mm ²	24	6 mm ²	12	—	2.5 mm ²	PSEM066416C1	PSEM066416C20N	
4	35 mm ²	24	6 mm ²	—	2	2.5 mm ²	PSEM066416C4	PSEM066416C30N	
4	35 mm ²	24	6 mm ²	12	2	2.5 mm ²	PSEM066416C5	PSEM066416C40N	
4	35 mm ²	24	6 mm ²	—	—	—	PSEM066416CG030	PSEM066416C50N	
4	35 mm ²	24	6 mm ²	12	—	2.5 mm ²	PSEM066416C1G030	PSEM066416C60N	
4	35 mm ²	24	6 mm ²	—	2	2.5 mm ²	PSEM066416C4G030	PSEM066416C70N	
4	35 mm ²	24	6 mm ²	12	2	2.5 mm ²	PSEM066416C5G030	PSEM066416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number; example: PPEM1224216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEX: Zones 1 and 2 – 21 and 22



Fiberglass Reinforced Polyester (FRP) Panel Arrangement F

Left Internal View

Front Internal View

Right Internal View

Top Internal View

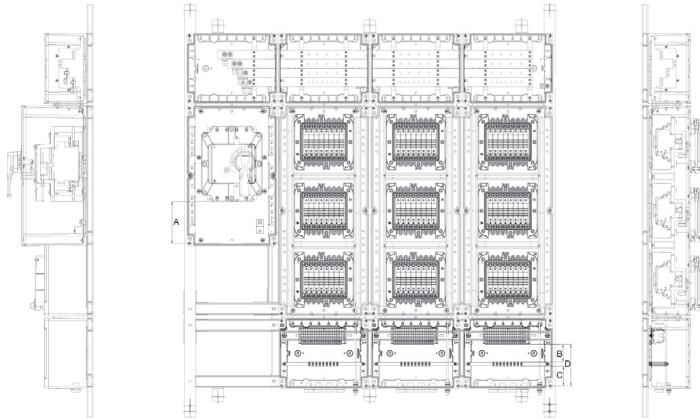

Dimensions in Millimeters (Inches)

A	150 (5.91)
B	61 (2.40)
C	40 (1.57)
D	147 (5.79)

Breaker Curve C	Branch Breakers				Armored Entries			Non-Armored Entries					
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	36	4 x 250 Amp	M63	36	M20	M63	36	M20	—	—
2-Poles 16 Amp	—	X	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
2-Poles 16 Amp	—	—	X	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M20	M25
2-Poles 16 Amp	—	X	X	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
2-Poles 16 Amp	X	—	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	—	—
2-Poles 16 Amp	X	X	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
2-Poles 16 Amp	X	—	X	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M20	M25
2-Poles 16 Amp	X	X	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
3-Poles 16 Amp	—	—	—	18	3 x 200 Amp	M63	18	M20	M63	18	M20	—	—
3-Poles 16 Amp	—	X	—	18	3 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
3-Poles 16 Amp	—	—	X	18	3 x 200 Amp	M63	18	M20	M63	18	M20	M20	M25
3-Poles 16 Amp	—	X	X	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
3-Poles 16 Amp	X	—	—	9	3 x 100 Amp	M40	9	M20	M40	9	M20	—	—
3-Poles 16 Amp	X	X	—	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M25	M25
3-Poles 16 Amp	X	—	X	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M20	M25
3-Poles 16 Amp	X	X	X	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
4-Poles 16 Amp	—	—	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	—	—
4-Poles 16 Amp	—	X	—	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M25	M25
4-Poles 16 Amp	—	—	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M20	M25
4-Poles 16 Amp	—	X	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
4-Poles 16 Amp	X	—	—	9	4 x 100 Amp	M40	9	M20	M40	9	M20	—	—
4-Poles 16 Amp	X	X	—	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M25	M25
4-Poles 16 Amp	X	—	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M20	M25
4-Poles 16 Amp	X	X	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) Panel Arrangement F

Technical Information

Panel F Size	1250 x 1280 x 230 mm
Panel Weight	200 kg (441 lb)
Max. No. of Circuits	See Panel Arrangement Size Selection Table
Voltage	220-240/380-415
Wiring	See Wiring Diagram Table

	Breaking Capacity in kA		
	Ratings in Amps	380/415 V	440 V ⑥
Mains	250 A	25	20
Bus-bar	250 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦	6 to 63 A	10	6
Panel Arrangement	250 A, 3 Ph, 5 W	20	-

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		“NC” Fault		Non-Armored ⑥	
				Qty ④	Qty ⑤	Auxiliary	Complete Catalog No	Ordering Catalog No	
4	120 mm ²	72	6 mm ²	—	—	—	PPFM1636216C	PPFM1636216C10N	
4	120 mm ²	36	6 mm ²	36	—	2.5 mm ²	PPFM1618216C1	PPFM1618216C20N	
4	120 mm ²	36	6 mm ²	—	2	2.5 mm ²	PPFM1618216C4	PPFM1618216C30N	
4	120 mm ²	36	6 mm ²	36	2	2.5 mm ²	PPFM1618216C5	PPFM1618216C40N	
4	120 mm ²	36	6 mm ²	—	—	—	PPFM1618216CG030	PPFM1618216C50N	
4	120 mm ²	36	6 mm ²	36	—	2.5 mm ²	PPFM1618216C1G030	PPFM1618216C60N	
4	120 mm ²	36	6 mm ²	—	2	2.5 mm ²	PPFM1618216C4G030	PPFM1618216C70N	
4	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PPFM109216C5G030	PPFM109216C80N	
3	120 mm ²	36	6 mm ²	—	—	—	PPFM1518316C	PPFM1518316C10N	
3	120 mm ²	36	6 mm ²	36	—	2.5 mm ²	PPFM1518316C1	PPFM1518316C20N	
3	120 mm ²	36	6 mm ²	—	2	2.5 mm ²	PPFM1518316C4	PPFM1518316C30N	
3	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PPFM099316C5	PPFM099316C40N	
3	50 mm ²	18	6 mm ²	—	—	—	PPFM099316CG030	PPFM099316C50N	
3	50 mm ²	18	6 mm ²	18	—	2.5 mm ²	PPFM099316C1G030	PPFM099316C60N	
3	50 mm ²	18	6 mm ²	—	2	2.5 mm ²	PPFM099316C4G030	PPFM099316C70N	
3	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PPFM099316C5G030	PPFM099316C80N	
4	120 mm ²	36	6 mm ²	—	—	—	PPFM1618416C	PPFM1618416C10N	
4	50 mm ²	18	6 mm ²	18	—	2.5 mm ²	PPFM109416C1	PPFM109416C20N	
4	50 mm ²	18	6 mm ²	—	2	2.5 mm ²	PPFM109416C4	PPFM109416C30N	
4	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PPFM109416C5	PPFM109416C40N	
4	50 mm ²	18	6 mm ²	—	—	—	PPFM109416CG030	PPFM109416C50N	
4	50 mm ²	18	6 mm ²	18	—	2.5 mm ²	PPFM109416C1G030	PPFM109416C60N	
4	50 mm ²	18	6 mm ²	—	2	2.5 mm ²	PPFM109416C4G030	PPFM109416C70N	
4	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PPFM109416C5G030	PPFM109416C80N	

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number, example: PPFM1436216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEX: Zones 1 and 2 – 21 and 22



Stainless Steel Panel Arrangement F

Left Internal View

Front Internal View

Right Internal View

Top Internal View

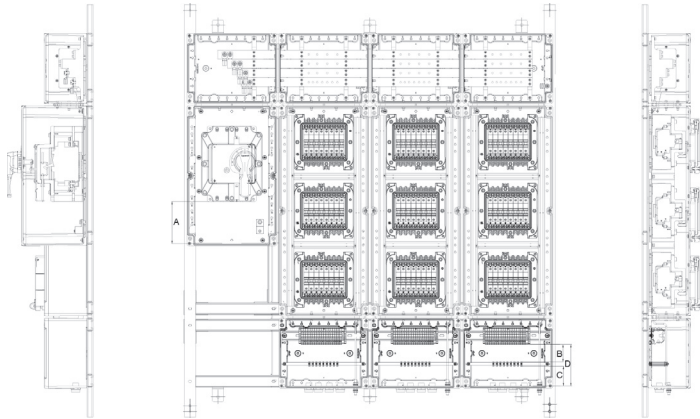

Dimensions in Millimeters (Inches)	
A	150 (5.91)
B	61 (2.40)
C	40 (1.57)
D	147 (5.79)

Breaker Curve C	Branch Breakers				Armored Entries			Non-Armored Entries					
	30mA GFI	1 Position Contact "NO"	1 Trip Contact "NC"	Circuit Breaker Qty	Main Breaker Size	Incoming Size, Qty 1	Outgoing Qty	Outgoing Size	Incoming Size	Outgoing Qty	Outgoing Size, Qty 1	Armored Auxiliary, Qty 1	Non-Armored Auxiliary, Qty 1
2-Poles 16 Amp	—	—	—	36	4 x 250 Amp	M63	36	M20	M63	36	M20	—	—
2-Poles 16 Amp	—	X	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
2-Poles 16 Amp	—	—	X	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M20	M25
2-Poles 16 Amp	—	X	X	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
2-Poles 16 Amp	X	—	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	—	—
2-Poles 16 Amp	X	X	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
2-Poles 16 Amp	X	—	X	18	4 x 200 Amp	M63	18	M20	M63	18	M20	M20	M25
2-Poles 16 Amp	X	X	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
3-Poles 16 Amp	—	—	—	18	3 x 200 Amp	M63	18	M20	M63	18	M20	—	—
3-Poles 16 Amp	—	X	—	18	3 x 200 Amp	M63	18	M20	M63	18	M20	M32	M40
3-Poles 16 Amp	—	—	X	18	3 x 200 Amp	M63	18	M20	M63	18	M20	M20	M25
3-Poles 16 Amp	—	X	X	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
3-Poles 16 Amp	X	—	—	9	3 x 100 Amp	M40	9	M20	M40	9	M20	—	—
3-Poles 16 Amp	X	X	—	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M25	M25
3-Poles 16 Amp	X	—	X	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M20	M25
3-Poles 16 Amp	X	X	X	9	3 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
4-Poles 16 Amp	—	—	—	18	4 x 200 Amp	M63	18	M20	M63	18	M20	—	—
4-Poles 16 Amp	—	X	—	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M25	M25
4-Poles 16 Amp	—	—	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M20	M25
4-Poles 16 Amp	—	X	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25
4-Poles 16 Amp	X	—	—	9	4 x 100 Amp	M40	9	M20	M40	9	M20	—	—
4-Poles 16 Amp	X	X	—	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M25	M25
4-Poles 16 Amp	X	—	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M20	M25
4-Poles 16 Amp	X	X	X	9	4 x 100 Amp	M40	9	M20	M40	9	M20	M32	M25

Distribution Equipment

IEC PlexPower™ Factory Sealed Panelboard

Increased Safety

ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel Panel Arrangement F

Technical Information

Panel F Size	1370 x 1320 x 230 mm		
Panel Weight	200 kg (441 lb)		
Max. No. of Circuits	See Panel Arrangement Size Selection Table		
Voltage	220-240/380-415		
Wiring	See Wiring Diagram Table		
Breaking Capacity in kA			
	Ratings in Amps	380/415 V	440 V ⑧
Mains	250 A	25	20
Bus-bar	250 A	50	50
Branch Breakers ⑦	0.5 to 4 A	50	25
Branch Breakers ⑦ ①	6 to 63 A	10	6
Panel Arrangement	250 A, 3 Ph, 5 W	20	-

Terminals ①

Qty ②	Incoming	Qty ③	Outgoing	“NO” Position		Auxiliary	Non-Armored ⑥	
				Qty ④	Qty ⑤		Complete Catalog No	Ordering Catalog No
4	120 mm ²	72	6 mm ²	—	—	—	PSFM1836216C	PSFM1836216C10N
4	120 mm ²	36	6 mm ²	36	—	2.5 mm ²	PSFM1618216C1	PSFM1618216C20N
4	120 mm ²	36	6 mm ²	—	2	2.5 mm ²	PSFM1618216C4	PSFM1618216C30N
4	120 mm ²	36	6 mm ²	36	2	2.5 mm ²	PSFM1618216C5	PSFM1618216C40N
4	120 mm ²	36	6 mm ²	—	—	—	PSFM1618216CG030	PSFM1618216C50N
4	120 mm ²	36	6 mm ²	36	—	2.5 mm ²	PSFM1618216C1G030	PSFM1618216C60N
4	120 mm ²	36	6 mm ²	—	2	2.5 mm ²	PSFM1618216C4G030	PSFM1618216C70N
4	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PSFM109216C5G030	PSFM109216C80N
3	120 mm ²	36	6 mm ²	—	—	—	PSFM1518316C	PSFM1518316C10N
3	120 mm ²	36	6 mm ²	36	—	2.5 mm ²	PSFM1518316C1	PSFM1518316C20N
3	120 mm ²	36	6 mm ²	—	2	2.5 mm ²	PSFM1518316C4	PSFM1518316C30N
3	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PSFM099316C5	PSFM099316C40N
3	50 mm ²	18	6 mm ²	—	—	—	PSFM099316CG030	PSFM099316C50N
3	50 mm ²	18	6 mm ²	18	—	2.5 mm ²	PSFM099316C1G030	PSFM099316C60N
3	50 mm ²	18	6 mm ²	—	2	2.5 mm ²	PSFM099316C4G030	PSFM099316C70N
3	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PSFM099316C5G030	PSFM099316C80N
4	120 mm ²	36	6 mm ²	—	—	—	PSFM1618416C	PSFM1618416C10N
4	50 mm ²	18	6 mm ²	18	—	2.5 mm ²	PSFM109416C1	PSFM109416C20N
4	50 mm ²	18	6 mm ²	—	2	2.5 mm ²	PSFM109416C4	PSFM109416C30N
4	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PSFM109416C5	PSFM109416C40N
4	50 mm ²	18	6 mm ²	—	—	—	PSFM109416CG030	PSFM109416C50N
4	50 mm ²	18	6 mm ²	18	—	2.5 mm ²	PSFM109416C1G030	PSFM109416C60N
4	50 mm ²	18	6 mm ²	—	2	2.5 mm ²	PSFM109416C4G030	PSFM109416C70N
4	50 mm ²	18	6 mm ²	18	2	2.5 mm ²	PSFM109416C5G030	PSFM109416C80N

① Ground bar supplied for each connection.

② Incoming cables terminate directly to the main breaker.

③ Outgoing terminal blocks for branch breakers (provided).

④ Each “NO” position contact are individually terminate on the terminal blocks and in pairs.

⑤ All “NC” trip contacts must be wired in series and terminated on terminal blocks as one pair only.

⑥ For armored version, replace the letter A with the letter N, in the last position of the Ordering Catalog Number, example: PPFM1436216C10A.

⑦ For higher kA rating please consult your local sales representative.

⑧ Without GFI.

IEC PlexPower™ Factory Sealed Panelboard


Increased Safety

ATEX/IECEX: Zones 1 and 2 – 21 and 22


Wiring Diagrams — Panel Arrangements B, C, D, E, F — For Panel Arrangement A, Remove Main Breaker from Wiring Diagrams

Q1: Main Breaker
M1-M8: Module Housing
D1-▲: MCB


2-Pole

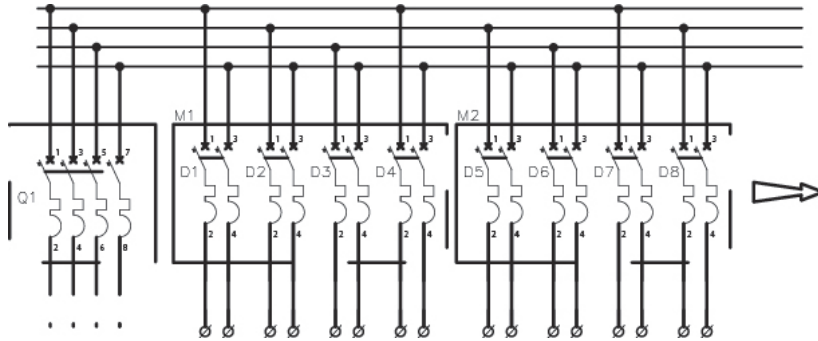

2-Pole + GFI

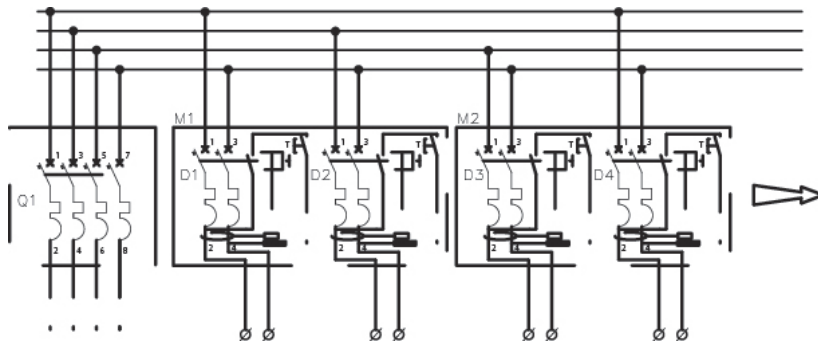

2-Pole + GFI + AUX NO + AUX NC

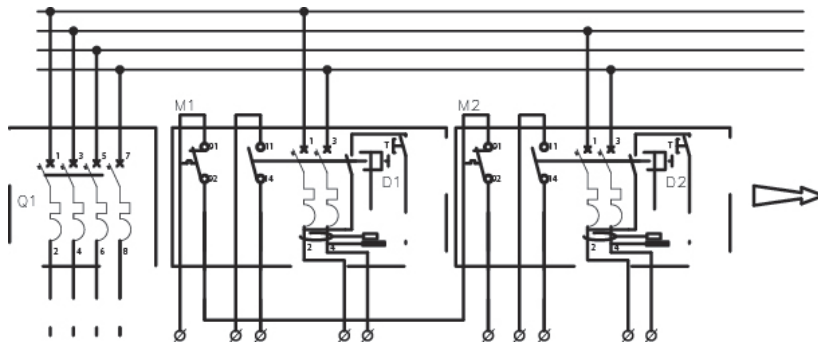

Distribution Equipment

▲ Number of branch circuit breakers will depend on the number of module housing.


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) — Standard Panel Arrangement Layout — Dimensions in Millimeters (Inches)

Panel Arrangement A

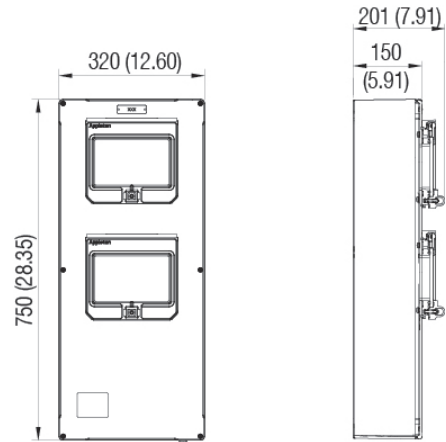

Panel Arrangement B

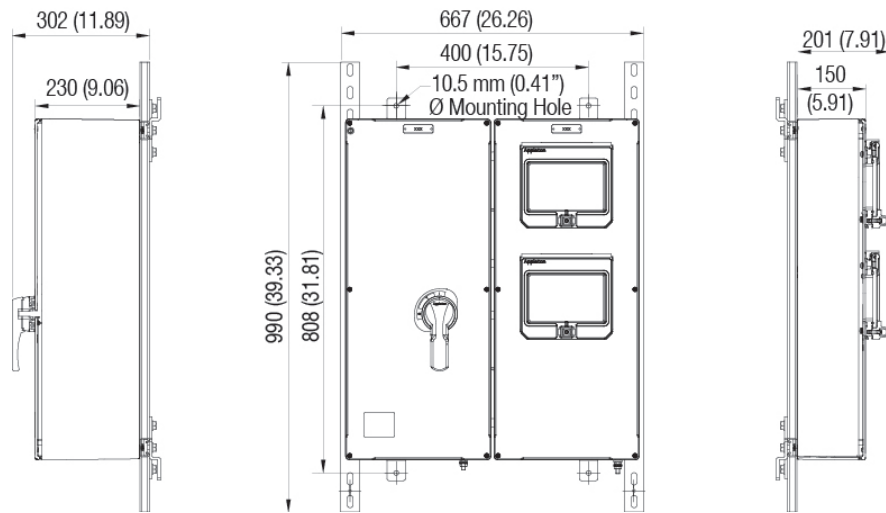

Distribution Equipment


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) — Standard Panel Arrangement Layout — Dimensions in Millimeters (Inches)

Panel Arrangement C

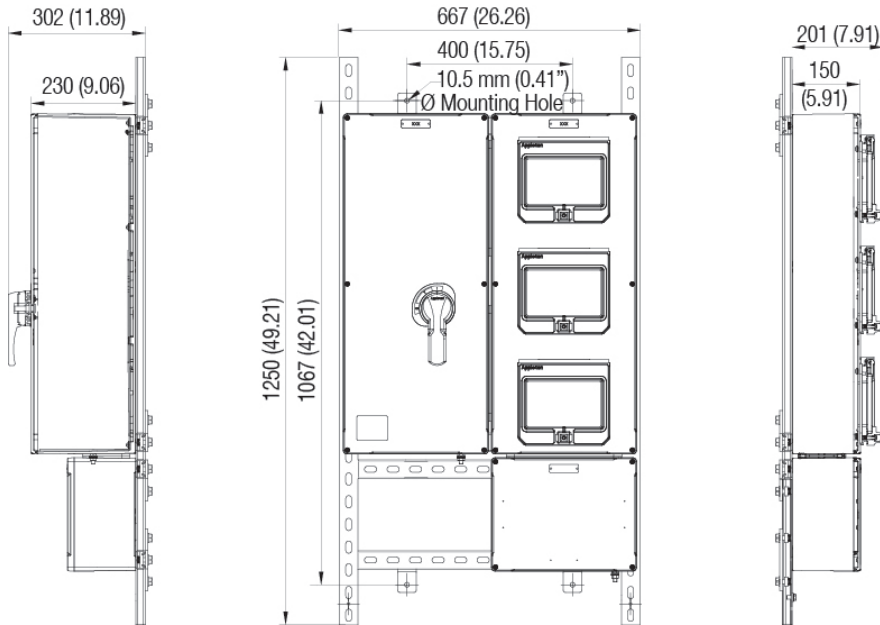

Panel Arrangement D

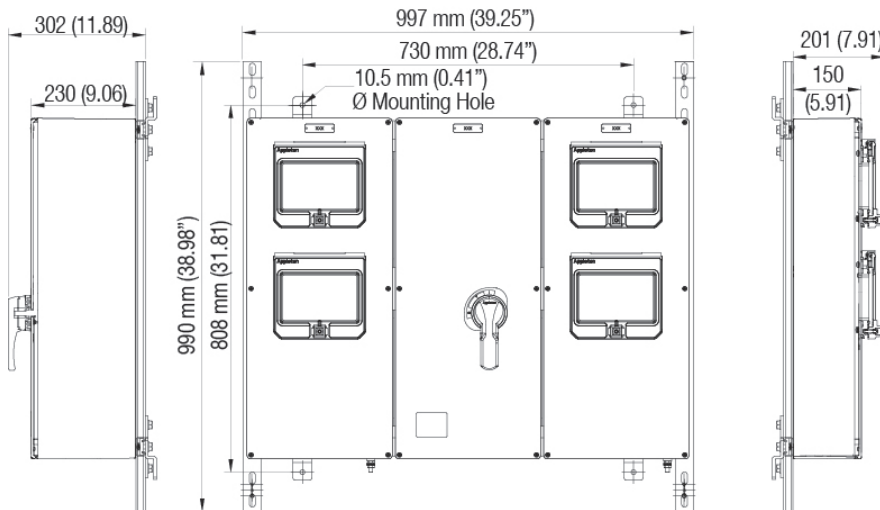

Distribution Equipment


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22

Fiberglass Reinforced Polyester (FRP) — Standard Panel Arrangement Layout — Dimensions in Millimeters (Inches)

Panel Arrangement E

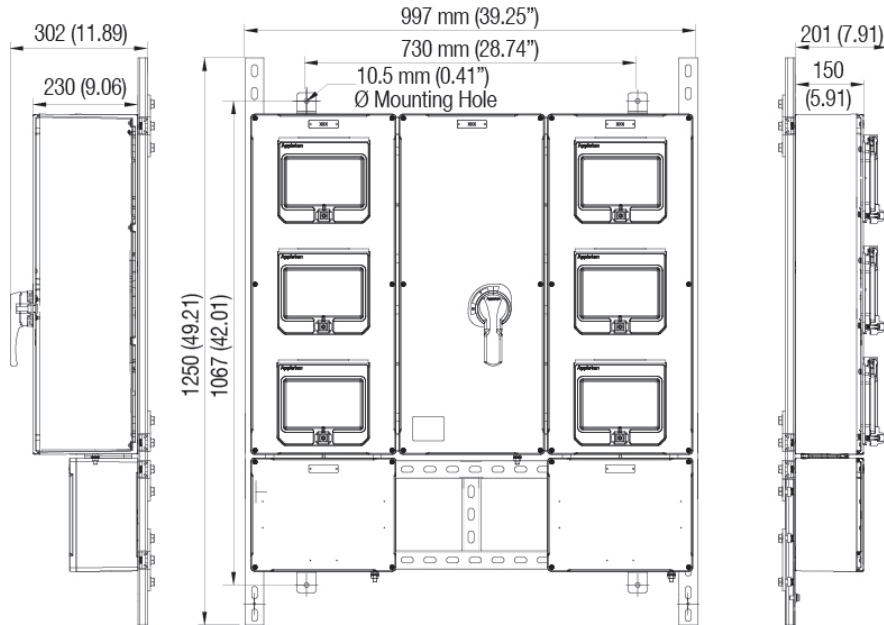

Panel Arrangement F

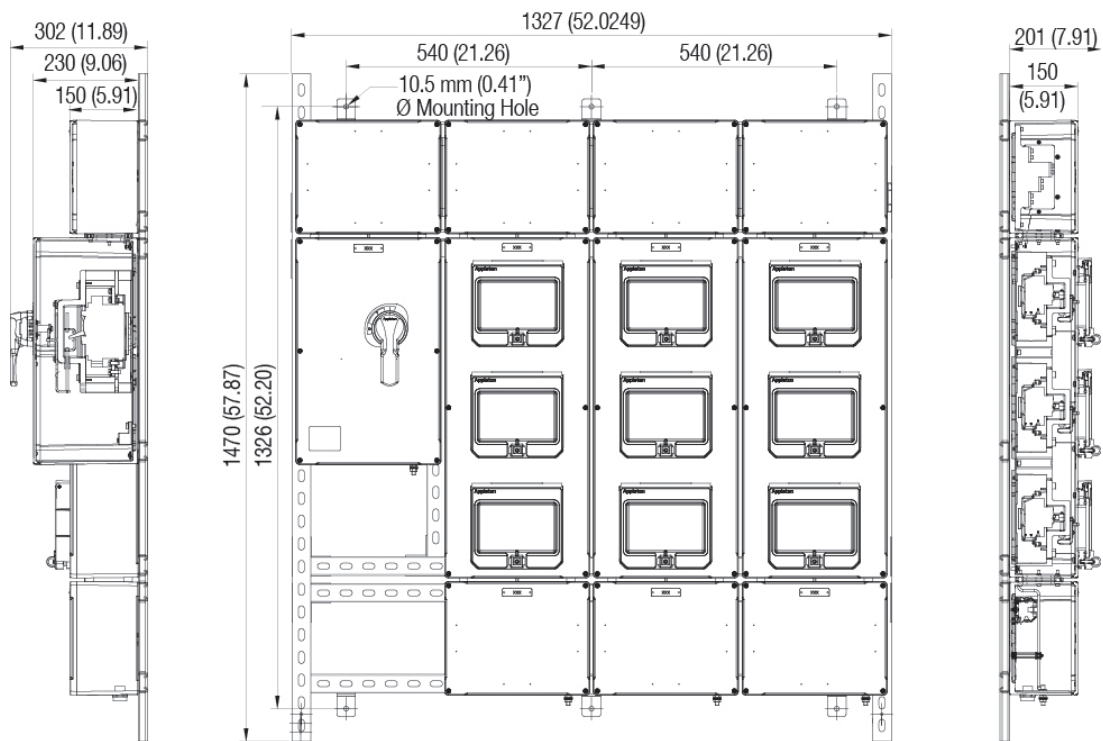

Distribution Equipment


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEX: Zones 1 and 2 – 21 and 22

Stainless Steel — Standard Panel Arrangement Layout — Dimensions in Millimeters (Inches)

Panel Arrangement A

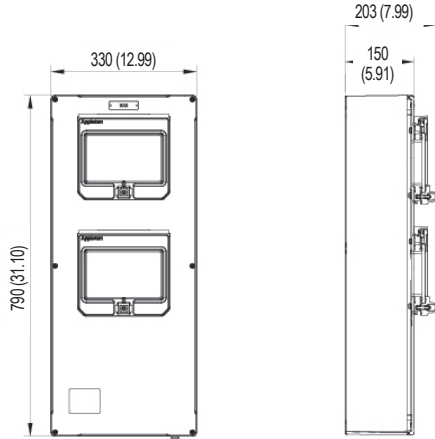

Panel Arrangement B

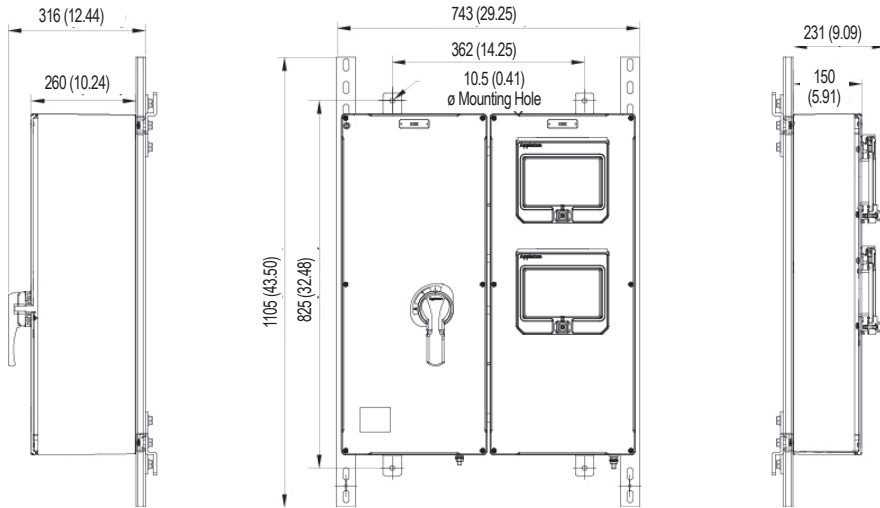

Distribution Equipment


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEx: Zones 1 and 2 – 21 and 22

Stainless Steel — Standard Panel Arrangement Layout — Dimensions in Millimeters (Inches)

Panel Arrangement C

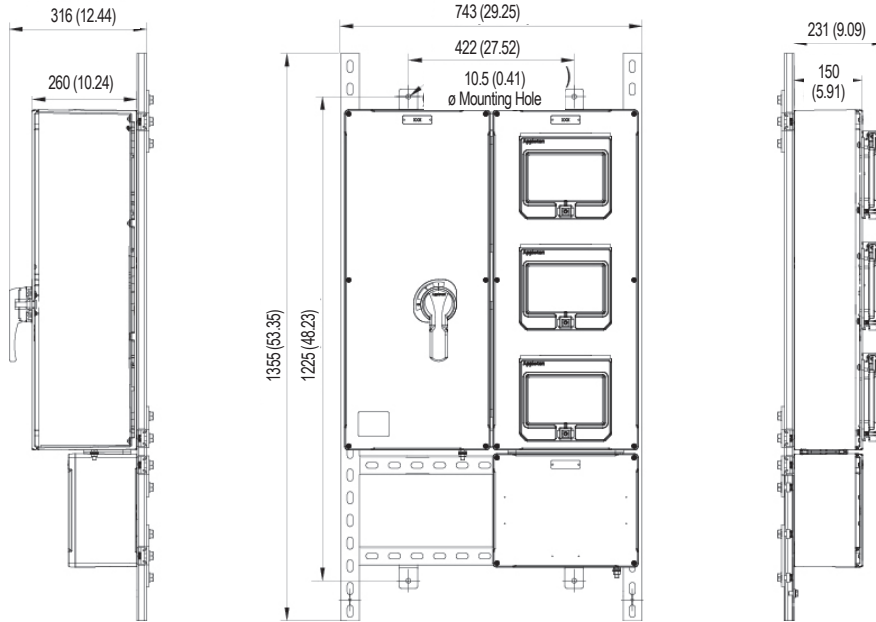

Panel Arrangement D

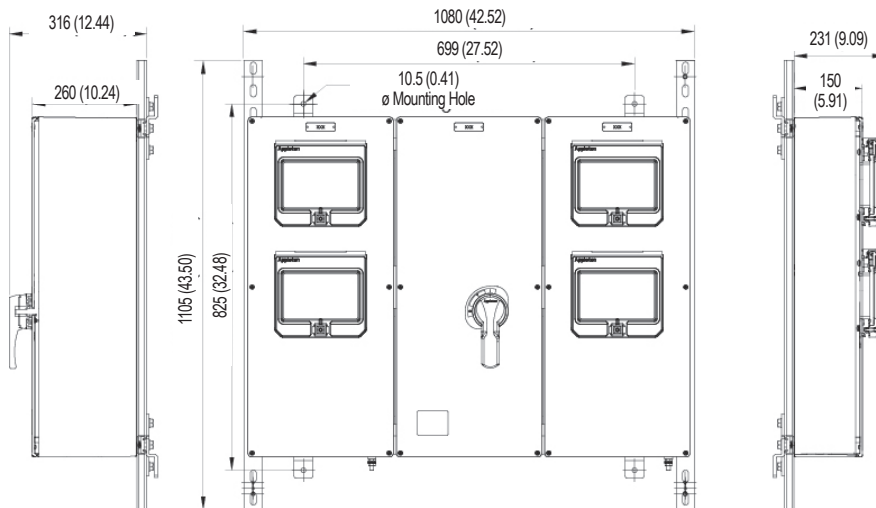

Distribution Equipment


IEC PlexPower™ Factory Sealed Panelboard

Increased Safety


ATEX/IECEX: Zones 1 and 2 – 21 and 22

Stainless Steel Standard — Panel Arrangement Layout — Dimensions in Millimeters (Inches)

Panel Arrangement E

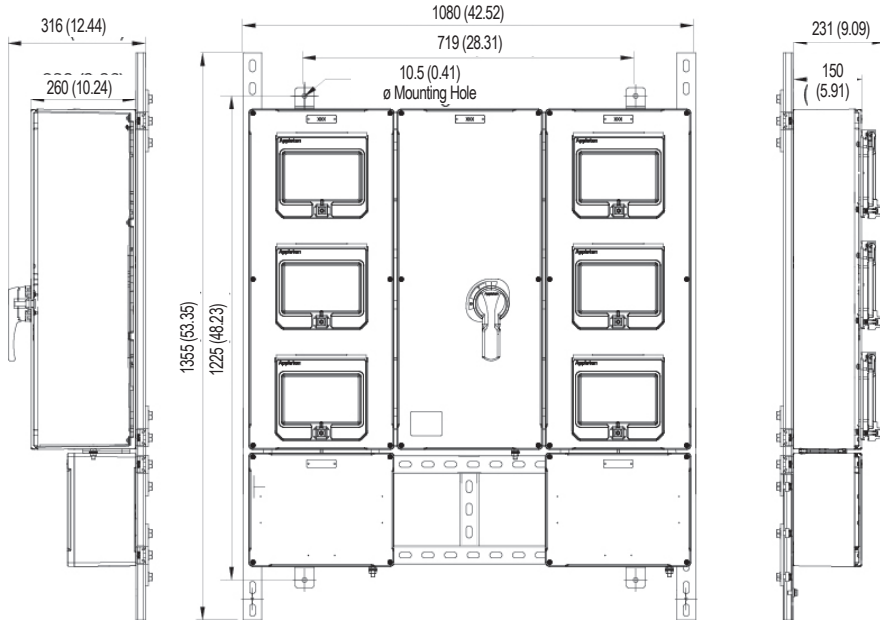

Panel Arrangement F

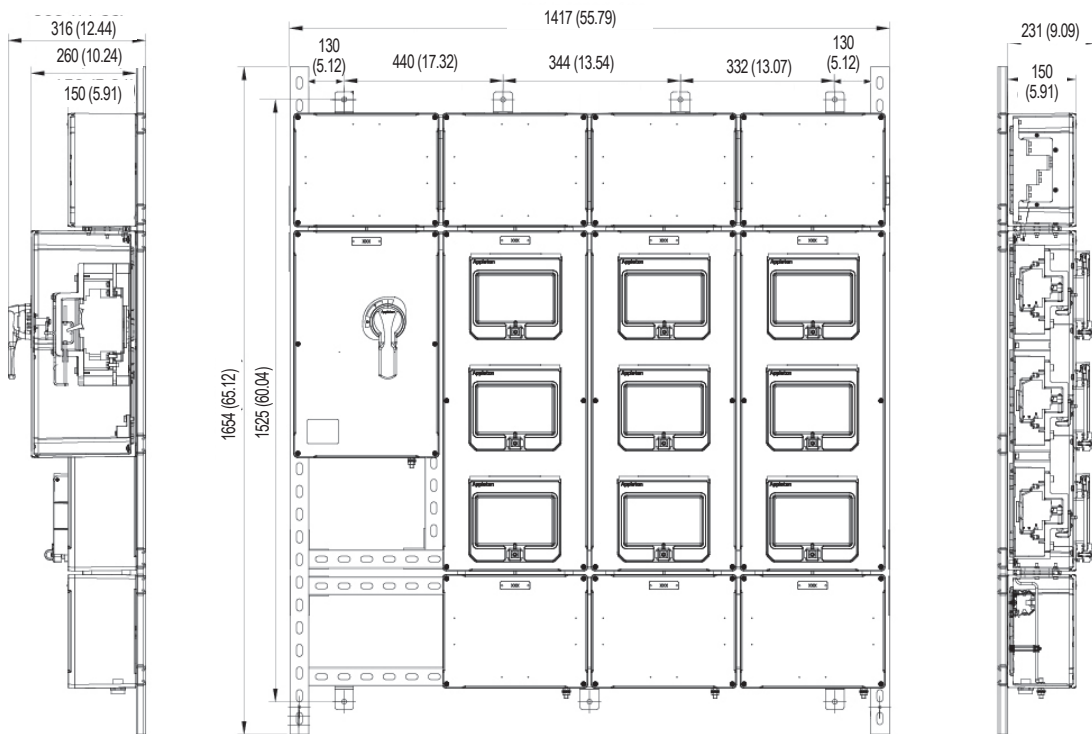

Distribution Equipment